

HDMI® to VGA Video Converter with Audio

HDMI2VGA

DE: Bedienungsanleitung - de.startech.com

FR: Guide de l'utilisateur - fr.startech.com

ES: Guía del usuario - es.startech.com

IT: Guida per l'uso - it.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

Packaging Contents

- 1 x HDMI to VGA converter
- 1 x DE-15 VGA to Component RCA cable adapter
- 1 x Universal Power Adapter
- 1 x Installation Guide


System Requirements

- HDMI enabled video/source
- VGA or YPbPr component enabled display device
- Stereo audio speakers with 3.5mm mini-jack (optional)
- Available electrical outlet

Installation


1. Make sure all devices are powered off before installing the HDMI2VGA converter.
2. Connect the HDMI video/audio source to the HDMI2VGA converter using a standard male/male HDMI cable.
3. If connecting the HDMI2VGA to a VGA display device, use a standard male/male VGA cable. Set the "Output" selector switch to RGB mode.
4. If connecting the HDMI2VGA to a component video (YPbPr) display device, use the included VGA to RCA component cable adapter. Set the "Output" selector switch to YPbPr mode.

Front View

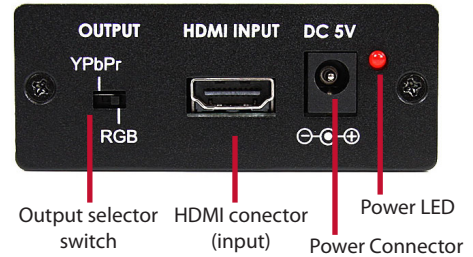

Rear View

*actual product may vary from photos

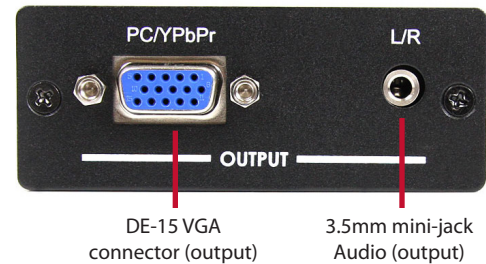

OPTIONAL: If the HDMI source is also transmitting audio, stereo speakers/headphones may be connected to the 3.5mm mini-jack connector.

5. Connect the power adapter from a power outlet to the HDMI2VGA converter. The LED next to the power connector should light up solid.
6. Power on the display device.
7. Power on the HDMI video/audio source.
8. The HDMI2VGA converter will automatically convert the incoming video signal to the configured output signal. The video resolution, refresh/scan rate, etc. will remain the same as the original.

Specifications

Video Signal	RGBHV, YPbPr
Audio Signal	PCM
Connectors	1 x HDMI 1 x DE-15 VGA female 1 x 3.5mm mini-jack 1 x DC power
LEDs	1 x Power
Maximum Video Resolution	1920x1200@60Hz 1080p@50/60Hz
Power Adapter	5VDC, 2.6A, center positive
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	0°C ~ 60°C (32°F ~ 140°F)
Humidity	0 ~ 60% RH
Dimensions (WxHxD)	76.0mm x 30.0mm x 92.0mm
Weight	172g

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names & Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.