

## @-MOTION R15K HR steel 33 chrome with an FS



### DESCRIPTION

---

#### **Seat and backrest**

- soft upholstered seat
- fine mesh backrest available in a range of colours

#### **Mechanism**

- free floating seat and backrest
- backrest and seat synchro tilting at the rate 2:1
- maximum backrest tilt angle 20° at 11° seat tilt
- possibility of seat and backrest lock in 5 positions
- adjustable backrest tilt force
- seat depth adjustment
- smoothly adjustable chair height with pneumatic lift

#### **Armrests**

- armrests adjustable across 3 dimensions

#### **Headrest**

- plastic headrest

#### **Base**

- polished aluminum

**Other**

- visitor version available

**FINISHES**

---

**CONTRACT**



**Composition:** 100% polyester

**Weight:** 320 g/m<sup>2</sup>

**Abrasion Resistance:** 100 000 Martindale cycles

**Flammability:** EN 1021-1, EN 1021-2, BS 7176 low hazard, BS 7176 medium hazard, BS 5852 Crib 5, NF P 503 M1, DIN 4102 B1, UNI 9174 Classe 1

**Other:** Recycled EU Flower Certified

**MICROFIBRA**



**Composition:** 83% polyester, 17% cotton


**Weight:** 355 g/m<sup>2</sup>

**Abrasion Resistance:** 100 000 Martindale cycles

**Flammability:** EN 1021-1, EN 1021-2

**Other:** Zero Spot – protective layer against dirt, stains & water

**OBAN**

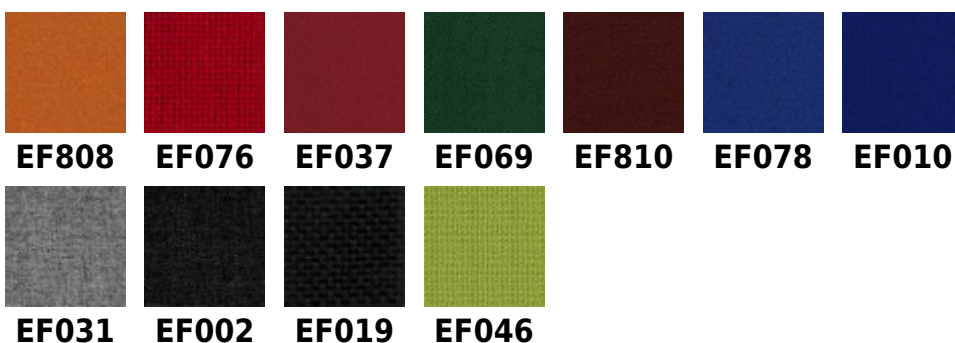

**Composition:** 100% polypropylene

**Weight:** 230 g/m<sup>2</sup>

**Abrasion Resistance:** grade A tested in accordance with EN 14465:2003

**Flammability:** EN 1021-1

**Other:** hygienic certificate by National Hygiene Institute in Poland

## LUCIA



**Composition:** 100% polyester


**Weight:** 260g/m<sup>2</sup>

**Abrasion Resistance:** 50 000 Martindale cycles

**Flammability:** EN 1021-1, EN 1021-2, BS 7176 low hazard, BS 476 Class 1

**Other:** Recycled EU Flower Certified

## MESH [@-MOTION]



### @-Motion net

**Composition:** 100% polyester

**Weight:** 353 g/m<sup>2</sup>

**Other:** certificate Öko Tex 100 – the fabric is tested against harmful to health substances at each stage of production

## BONDAI



**Composition:** 100% polyester

**Weight:** 250 g/m<sup>2</sup>

**Abrasion Resistance:** 150 000 Martindale cycles

**Flammability:** EN 1021-1, EN 1021-2, BS 7176 medium hazard, BS 5852 Crib 5

## KAIMAN



**Composition:** upper layer: 100% polyurethane  
bottom layer: 70% polyester, 30% cotton

**Weight:** 435 g/m<sup>2</sup>

**Abrasion Resistance:** 100 000 Martindale cycles

**Flammability:** BS 5885 Source 0

**Other:** Hydrolisis (DIN EN ISO 32100 (DIN 53351) / DIN 53359) - 15 000 revs

## SEMPRE



**Composition:** 100% polyester

**Weight:** 366 g/m<sup>2</sup>

**Abrasion Resistance:** 160 000 Martindale cycles

**Flammability:** EN 1021-1, EN 1021-2

**Other:** hygienic certificate by National Hygiene Institute in Poland

## VALENCIA



**Composition:** upper layer: 100% vinyl, bottom layer: 100% polyester Hi-Loft

**Weight:** 650 g/m<sup>2</sup>

**Abrasion Resistance:** 300 000 Martindale cycles

**Flammability:** EN 1021-1, EN 1021-2, DIN 4102 B2, NF P 92-503 M2, Önorm B 3825,

Önorm A 3800-1 Q1

**Other:** EN 71-3 Safety of toys (migration of certain elements)

PERMABLOK3® - superior antibacterial, antistain and antifungal protection

## XTREME




**Composition:** 100% polyester FR

**Weight:** 310 g/m<sup>2</sup>

**Abrasion Resistance:** 100 000 Martindale cycles

**Flammability:** EN 1021-1, EN 1021-2, BS 7176 low hazard, BS 7176 medium hazard, BS 5852 Crib 5, DIN 4102 B1, UNI 9174 Classe 1

## FINE LEATHER SD

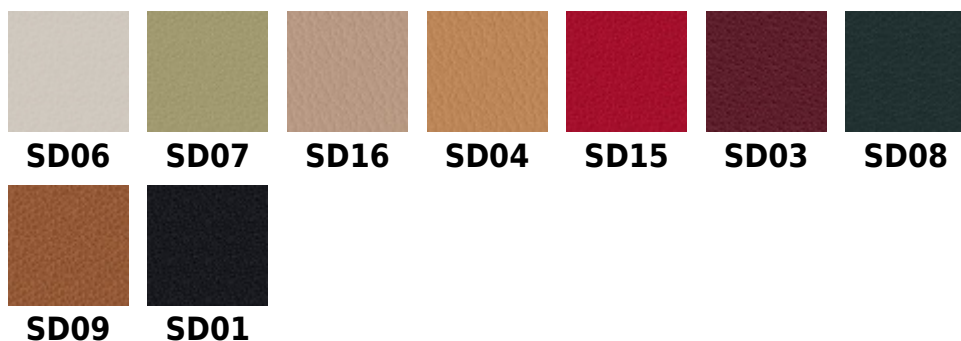

**Composition:** soft grain leather (0.9 - 1.1 mm), thoroughly dyed (completely dyed)

## FINE LEATHER LE



**Composition:** soft grain leather (0,9 - 1,1 mm), thoroughly dyed (completely dyed)

All rights reserved 2013 Nowy Styl Group

### CONTACT

Nowy Styl Sp. z o.o.  
Pużaka 49  
38-400 Krosno  
Tel. +48 13 43 76 100  
Fax +48 13 43 62 732  
info@nowystylgroup.com

### Export Department

Mięsowicza 6  
38-400 Krosno  
Poland  
Tel. +48 13 43 76 111  
export@nowystylgroup.com

### Marketing Department

Warszawska 15  
32-086 Węgrzce  
Poland  
Tel. +48 12 63 98 602