


## 1U Adjustable Cable Lacing Bar

### Product Diagram

#### 12S-CABLE-LACING-BAR

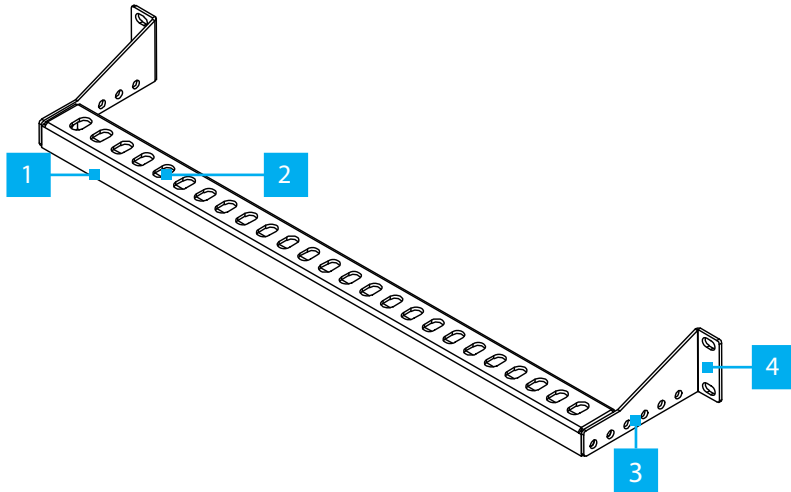

\*Product may vary from image

Component	Function
1 Lacing Bar	• Main body provides structural rigidity to support the cables
2 Lacing Points	• Allow cables to be laced or tied in an organized way by passing <b>Hook and Loop Ties</b> or <b>Plastic Ties</b> through the <b>Lacing Points</b>
3 Adjustable Depth Holes	• Allow to change the depth of the <b>Cable Lacing Bar</b> inside the <b>Rack</b> • Two <b>M4x8 Screws</b> on either side of the <b>Lacing Bar</b> secure it to the <b>Mounting Brackets</b>
4 Mounting Brackets	• Allow to attach the <b>Cable Lacing Bar</b> to the <b>Mounting Posts</b> of a <b>Rack</b>

### Product Information

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit: [www.StarTech.com/12S-CABLE-LACING-BAR](http://www.StarTech.com/12S-CABLE-LACING-BAR)

### Requirements

- Phillips Head Screwdriver
- Hook and Loop Ties or Plastic Ties
- (Optional) Cage Nut Tool

**Note:** M6 Screws and Cage Nuts are provided for convenience. Alternative mounting hardware may be needed from the Rack's manufacturer.

### Package Contents

- Lacing Shelf x 1
- M6 Screws x 4
- M6 Cage Nuts x 4
- M6 Plastic Washers x 4
- M4 Screws x 4
- Quick-Start Guide x1

### Installation

#### Assemble and Mount the Cable Lacing Bar

1. Determine the **Mounting Depth** needed according to your application.
2. On one side of the **Lacing Bar**, align its **Mounting Holes** with the **Adjustable Depth Holes** on the **Mounting Brackets** that correspond the required depth from **Step 1**.
3. Insert the **M4 Screws** (x 2) through the **Adjustable Depth Holes** and into the **Lacing Bar**. Use a **Phillips Head Screwdriver** to tighten the screws securely.
4. Repeat **Step 2** and **Step 3** on the opposite side of the **Lacing Bar** to complete the assembly.
5. Find a suitable location on the **Rack** to mount the **Cable Lacing Bar**. The **Cable Lacing Bar** requires **1U** of **Mounting Space**.
6. Follow the **Rack's Manufacturer Instructions** to install the included **M6 Cage Nuts** on the **Mounting Posts** of the **Rack**.

**Note:** If available, use a **Cage Nut Tool** or your preferred installation method to install the **Cage Nuts**

7. Place the **Cable Lacing Bar** onto the **Rack** and align the **Mounting Brackets** with the **Mounting Posts** of the **Rack**.
8. Insert the **M6 Screws** (x 4) through the **Plastic Washers**, the **Mounting Brackets**, and into the **Mounting Posts** of the **Rack**. Ensure the **M6 Screws** are appropriately tightened using a **Phillips Head Screwdriver**.

# Usage

## Cable Management

1. Plan the cable routing by identifying the path each cable should take from its source to its destination. It is recommended to group cables based on their function or destination.
2. Gather cables that follow the same path or are related to a specific component. Use **Hook and Loop Ties** or **Plastic Ties** to create **Cable Bundles**.  
*Note: Leave a bit of slack in each Cable Bundle to accommodate any future changes or adjustments without causing strain on the cables.*
3. Place the **Cable Bundles** at the **Left** and **Right** of the **Cable Lacing Bar** depending on the setup. Use the **Lacing Points** to pass through **Hook and Loop Ties** or **Plastic Ties** to secure the **Cable Bundles** in place.
4. (Optional) Consider labeling each **Cable** or **Cable Bundle** for easier identification.

## Regulatory Compliance

### Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders. PHILLIPS® is a registered trademark of Phillips Screw Company in the United States or other countries.

## Warranty Information

This product is backed by a two-year warranty.

For further information on product warranty terms and conditions, please refer to [www.startech.com/warranty](http://www.startech.com/warranty).

## Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

## Safety Measures

Assemble this product according to the instructions. Read the entire manual and ensure the instructions are fully understood before assembling and/or using this product.

## Mesures de Sécurité

Assemblez ce produit conformément aux instructions. Lisez l'intégralité du manuel et assurez-vous que les instructions sont bien comprises avant d'assembler et/ou d'utiliser ce produit.

## Veiligheidsmaatregelen

Monteer dit product volgens de instructies. Lees de gehele handleiding en zorg ervoor dat u de instructies volledig begrijpt voordat u dit product monteert en/of gebruikt.

## Säkerhetsåtgärder

Montera produkten enligt instruktionerna. Läs hela manualen och se till att du har förstått instruktionerna innan du monterar och/eller använder produkten.

## Sicherheitsmaßnahmen

Bauen Sie dieses Produkt gemäß der Anleitung zusammen. Lesen Sie das gesamte Handbuch und stellen Sie sicher, dass Sie die Anweisungen vollständig verstanden haben, bevor Sie dieses Produkt zusammenbauen und/oder verwenden.

## 安全対策

最初に取扱説明書を最後まで読み、本製品の組み立て方をすべて理解してから組み立て作業を始めて下さい。

## Misure di Sicurezza

Leggere l'intero manuale e assicurarsi di aver compreso tutte le istruzioni prima di iniziare ad assemblare e a utilizzare questo prodotto.

## Medidas de Seguridad

Monte este producto siguiendo las instrucciones. Lea todo el manual y asegúrese de que las instrucciones se entienden completamente antes de montar y/o utilizar este producto.



[www.quefairedemesdechets.fr](http://www.quefairedemesdechets.fr)

**StarTech.com Ltd.**  
45 Artisans Crescent  
London, Ontario  
N5V 5E9  
Canada

**StarTech.com LLP**  
4490 South Hamilton  
Road  
Groveport, Ohio  
43125  
U.S.A.

**StarTech.com Ltd.**  
Unit B, Pinnacle 15  
Gowerton Road  
Brackmills,  
Northampton  
NN4 7BW  
United Kingdom

**StarTech.com Ltd.**  
Siriusdreef 17-27  
2132 WT Hoofddorp  
The Netherlands

FR: [startech.com/fr](http://startech.com/fr)  
DE: [startech.com/de](http://startech.com/de)  
ES: [startech.com/es](http://startech.com/es)  
NL: [startech.com/nl](http://startech.com/nl)  
IT: [startech.com/it](http://startech.com/it)  
JP: [startech.com/jp](http://startech.com/jp)