NETGEAR[°]

ReadyNAS[®] 420 Series Network Attached Storage (NAS)

Data Sheet

RN426/RN428



RN426/RN428

High Performance Storage for Small Businesses

Data is one of the most valuable assets in any business. The sharing, storing, archiving and disaster recovery of data are critical elements in an IT infrastructure. In addition to these universal IT requirements for a small and medium size business, scalability, ease-of-use and cost effectiveness are essential measurements in selecting the right storage solution.

The ReadyNAS[®] 426 6-Bay storage and ReadyNAS 428 8-Bay storage offer the ideal solution to a small and medium size business (SMB) that requires high-capacity file serving and data backup to support workgroups of up to 40 employees. The ReadyNAS 420 series also includes the 2-Bay RN422 and 4-Bay RN424 that run the same ReadyNAS OS and apps.

All ReadyNAS support the entire suite of features in ReadyNAS OS, including 5 levels of data protection, ReadyDR disaster recovery, and virtualized storage for VMware and other virtualized networks.

These 426 and 428 NAS models also come with the latest ReadyNAS OS 6.7 software for ultimate security and reliability. New features include Cloud backup to Amazon S3 (AWS) on top of Google Drive, Dropbox and Egnyte content management, 3D configuration tool, future-proof and safer Linux 4.4, unique desktop RAID 50 and 60 for more reliable storage, and many more business features that enable the ultimate business features in ReadyNAS. Yield the benefits of the latest industrial and software design from NETGEAR with ReadyNAS storage.

All Inclusive Solution for Data Sharing, Storing & Securing



• File Sharing: Unified storage platform for sharing files between Windows, Mac and Linux-based computers

• Hard Drive Redundancy: RAID redundancy with automatic expansion and unlimited data snapshots for point-in-time restore.



• Cloud Collaboration: Share selected folders and files with ReadyCLOUD with partners, clients or internal teams



 Backup & Recovery: ReadyDR disaster recovery solution based on block level replication technology



 App Managed: Easily manage your ReadyNAS from the palm of your hand with NETGEAR Insight app



• Virtualization: Thin provisioning, iSCSI support and certified with VMware

Cloud-managed Replication: Maintain

• iSCSI and Thin Provisioning: Powerful

tools for a business taking advantage of

office locations

virtual infrastructures

data sets in multiple locations or ensure protection of data from remote or branch

Key Business Features



• Automatic Backup & Sync: Using the ReadyCLOUD app for PC, scheduled protection is easier than ever before



• Bit Rot Protection: A proprietary technology protecting your files from unplanned degradation



• Unlimited Snapshots: Unlimited data snapshot capability for on-box protection and flexible data recovery



• X-RAID & Instant Provisioning: Easily expand capacity and feel confident knowing that data is always protected



V



• Anti-virus & Encryption: Keep data protected from outside threats and safe from prying eyes



 Modern GUI and Cloud/Remote Access from Anywhere: Sleek modern interface and patented technology for secure remote access without configuration effort

NETGEAR[®]

ReadyNAS[®] 420 Series Network Attached Storage (NAS)


Data Sheet

RN426/RN428

ReadyNAS Solutions for total data protection

File Sharing


These days, running a successful business often depends on successful file sharing—application data, virtual images, client files, email, all the digital files that make your business go. With ReadyNAS, you finally have an advanced and easy-to-use solution for centralizing, securing, and sharing those critical assets. Faster processors mean more simultaneous users can access unified storage—across PC, Mac and Linux environments. ReadyCLOUD and full Dropbox integration make it easier than ever to sync your important files, photos or videos across all of your webconnected devices.

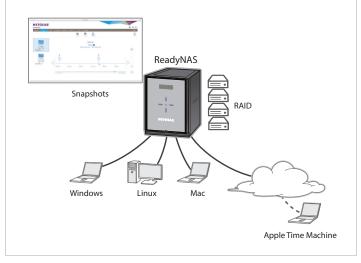

Data Backup & Recovery


With the built-in ReadyDR disaster recovery solution, you can backup your data to any other ReadyNAS, and recover the data rapidly in the event of a disaster to ensure business continuity. Combined to ReadyCLOUD file sharing, ReadyNAS becomes your ultimate solution for information distribution, data collection and comprehensive data security between your headquarters and your branch offices.



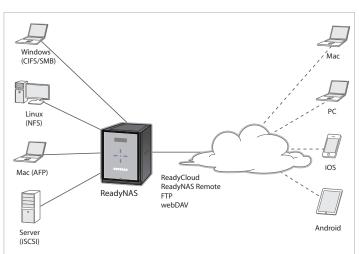

Computers Backup

Unlimited snapshots give you complete control over the past, present, and future of your data. This enterprise-class feature copies any point of time in the file system, can be manually or automatically scheduled, and can restore any version with a simple click. Other data protection innovations for disk-based storage like Real Time Anti-Virus and Encryption bring new confidence to the integrity of your data and back-ups.

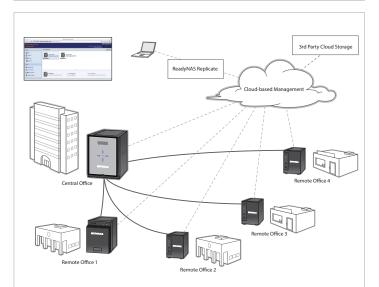

Virtualization for Private Cloud deployment

ReadyNAS is also VMWare vSphere ESXi 6.0 certified for highperformance virtualized storage with workload-heavy VM support, unlimited Snapshots, thin provisioning, and improved iSCSI support. Build your own Private Cloud for data compliance and privacy which might not be compatible with public cloud solutions.

NETGEAR[®]

ReadyNAS[®] 420 Series Network Attached Storage (NAS)

Data Sheet

RN426/RN428

ReadyNAS Desktop Model Comparison - 420 Series

_			
	ReadyNAS 426	ReadyNAS 428	
CPU	Intel Atom C3000 Quad Core Processor	Intel Atom C3000 Quad Core Processor	
Memory	4GB DDR4	4GB DDR4	
Drive Bays	6	8	
Drive Types Supported	SATA/SSD 2.5" or 3.5"	SATA/SSD 2.5" or 3.5"	
Hot Swappable Drives	Yes	Yes	
Tool-less 3.5" disk installation	Yes	Yes	
eSATA Expansion Ports	1	1	
Internal capacity based on 10TB HDD	RN426: 60TB RN428: 80TB		
Gigabit LAN Ports	4	4	
USB Ports	Two (2) USB 3.0 (1 front, 1 rear)	Two (2) USB 3.0 (1 front, 1 rear)	
Power Supply	Internal 200W PSU	Internal 200W PSU	
BTU at Full power supply utilization	68.57W	91.47W	
Power consumption: Operation	63.11W	78.15W	
Power consumption: (Wake on LAN)	4.6W	4.6W	
Power consumption: (Power Off)	189mW	189mW	
2-Line LCD Display	Yes	Yes	
Push Button Navigation	Yes	Yes	
Fan (mm)	120mm	2x 92mm	
Dimensions DxWxH (mm)	277 x 192 x 259	278 x 192 x 310	
Weight (kg)	7.43kg	9.01kg	
ProSUPPORT Service Packs Available On Call 24x7	1-year: PMB0312 3-year: PMB0332 5-year: PMB0352	1-year: PMB0312 3-year: PMB0332 5-year: PMB0352	
Bluetooth dongle	No	No	
Recommended max of users	40	40	
Available configurations	Diskless and populated models with desktop or enterprise HDD available		

NETGEAR[®]

ReadyNAS[®] 420 Series Network Attached Storage (NAS)

Data Sheet

RN426/RN428

Technical Specifications

Data Protection (Backup & Replication)

- Unlimited block-based snapshots for continuous data protection
- Restore Snapshots to any point in time
- Restore Snapshot data from local admin GUI, ReadyCLOUD, or native Windows File Explorer
- · Scheduled and manual snapshots
- Instantly clone snapshots
- File Synchronization (rsync)
- Encrypted Remote Replication
- Cloud managed Remote Replication (ReadyNAS to ReadyNAS). No licenses required for ReadyNAS OS 6 devices.
- AES 256-bit volume based encryption
- X-RAID[™] (automatic single volume online expansion)
- Expand multiple RAID groups (vdev)
- Single Disk, JBOD
- RAID Levels: 0, 1, 5, 6, 10, 50, 60
- RAID Global Hot Spare
- eSATA external HDD
- Backup to external storage (USB/eSATA)
- Apple Time Machine support
- Remote Apple Time Machine backup and restore (over ReadyNAS Remote)
- ReadyNAS Vault Cloud backup (optional service)
- Amazon Cloud Drive synchronization (requires Amazon account)
- DropBox file synchronization (requires DropBox account)
- Real-time Anti-Virus scanning using signature and heuristic algorithms. (No end-user licenses required) Protection for viruses, malware, worms, and Trojans.
- Bitrot automatic detection & correction for degraded media
- ReadyDR block level replication technology
- ReadyDR backup from any ReadyNAS to any
- ReadyNAS (Intel based)
- $\boldsymbol{\cdot}$ ReadyDR for shares and LUNs backup

Storage Area Networks (SAN), Virtualization

- Unlimited iSCSI LUN Snapshot
- Thin or thick provision LUNs
- Multi-LUN per target
- LUN mapping
- LUN masking
- SPC-3 Persistent Reservation (iSCSI)
- MPIO (iSCSI)
- MC/S (iSCSI)
- Max # iSCSI Target: 256

- Max # iSCSI LUN: 256
- VMware vSphere 5
- Citrix XenServer 6
- Windows Server 2008 Hyper-V
- Windows Server 2008 Failover Clustering
- Windows Server 2012 R2

ReadyCLOUD (cloud access to ReadyNAS)

- ReadyCLOUD portal based data access and management
- Upgrade firmware remotely
- VPN quality remote data transfer and management
- Share data with external parties & co-workers directly from portal
- Share file via email link

ReadyCLOUD Client Applications

- ReadyCLOUD client applications for Apple OS X, Microsoft Windows, Android, and Apple iOS
- VPN quality remote data transfer and management
- Simple remote access through ReadyCLOUD client (no firewall or router configuration needed)
- Sync files/folders between PC (Mac/ Windows) & ReadyNAS
- Sync files/folders between multiple PCs and ReadyNAS
- Sync files/folders between multiple users & ReadyNAS
- Backup files/folders from PC to ReadyNAS
- Sync files/folders between PC (Mac/ Windows) & ReadyNAS
- Sync files/folders between multiple PCs and ReadyNAS
- Sync files/folders between multiple users & ReadyNAS
- · Backup files/folders from PC to ReadyNAS

File System & Transfer Protocols

- ReadyNAS OS 6.6 or later
- Linux 4.x
- Internal File System: BTRFS
- External File System: EXT3, EXT4, NTFS, FAT32, HFS+
- Copy-on-write file system

Page 4 of 5

- Data Compression
- Microsoft Network (CIFS/SMB 3)
- Apple OS X (AFP 3.3)
- Linux/Unix (NFS v4)
- Internet (HTTP)

- Secure Internet (HTTPS)
- File Transfer Protocol (FTP)
- FTP over SSL/TLS (explicit)
- FTP Passive mode with port range setup
- FTP Bandwidth control
- FTP Anonymous
- FTP Transfer Log
- Secure Shell (SSH)
- Web Authoring (WebDAV)
- Storage Array Network (iSCSI)
- File Synchronization (rsync)
- · Local web file manager

Users/Groups:

- Max # Users: 8192
- Max # User Groups: 8192
- Max # Share Folder: 1024
- Max # Concurrent Connections: 1024
- Share Folder Level ACL Support
- Advanced Folder Permissions with Subfolder ACL support for CIFS/SMB, AFP, FTP
- Microsoft Active Directory (AD) Domain Controller Authentication
- Local access list

Management

management

(clone devices)

Local event log

Unicode support

protection

Apple Safari 5+)

Volume Management

Thin provision Shares and LUNs

• Restore to factory default

- ReadyCLOUD based ACL
- Domain user login via CIFS/SMB, AFP, FTP

• ReadyCLOUD cloud-based discovery and

• RAIDar local discovery agent (Windows/Mac)

· Save and restore system configuration

• Local Graphical User Interface (GUI)

Languages: English, German, French,

Russian, Swedish, Portuguese, Italian,

Spanish, Polish, Czech, Dutch, Korean

· Instant Provisioning/Expansion with data

Operating Systems supported: Microsoft

Unix, Solaris, Apple iOS, Google Android

Mozilla Firefox 14+, Google Chrome 20+,

 Supported Web Browsers (Microsoft Internet Explorer 9+, Microsoft Edge,

Windows 7, 8/8.1, 10, Microsoft Windows

Server 2008 R2/2012, Apple OS X, Linux/

Japanese, Chinese (Traditional & Simplified),

• Connection reporting (SMB)

NETGEAR[°]

ReadyNAS[®] 420 Series Network Attached Storage (NAS)

Data Sheet

RN426/RN428

Technical Specifications

System Monitoring

- Device capacity, performance, resource and health monitoring
- Bad block scan
- Hard Drive S.M.A.R.T.
- File System Check
- Disk Scrubbing
- Disk Defragment
- Volume balance
- Alerts (SMTP email, LCD, SNMP, local log)
- Auto-shutdown (hard drive, fan, UPS)
- Auto-restart on power recovery

Networking Protocols

- TCP/IP
- IPv4
- IPv6
- Static IP Address
- Dynamic IP Address
- Multiple IP Settings
- DHCP Client
- UPnP Discovery
- Bonjour Discovery
- Link Aggregation IEEE 802.3ad
- Port Trunking (balanced round robin, active backup, balance xor, broadcast, 802.3ad link aggregation LACP, transmit load balancing, adaptive load balancing)
- Hash Types IEEE 802.3ad LACP or XOR (Layer 2, Layer3, Layer 4)
- Jumbo Frames
- Static routes

Next

- Secure Shell (SSH)
- Simple Network Management Protocol v2, v3
- Network Time Protocol (NTP)

Media

- ReadyDLNA (UPnP DLNA Media Server)
- ReadyDLNA streams to any compliant device including Playstation and Xbox
- ReadyDLNA mobile clients for remote media streaming (iOS, Android)
- ReadyDLNA supported music formats (wav, wma, pcm, ogg, mp3, m4a, flac, aac)
- ReadyDLNA supported photo formats (jpg, jpeg)
- ReadyDLNA supported video formats (3gp, mp4, wmv, xvid, vob, ts, tivo, mts, mpeg, mpg, mp4, mov, mkv, m4v, m4p, m2t, m2ts, flv,flc, fla, divx, avi, asf)
- ReadyDLNA supported playlist formats (pls, m3u)
- ReadyNAS Surveillance (free trial, license required) supports over 85 brands and 2000 models of IP cameras
- ReadyNAS Surveillance supports up to 32 HD cameras
- iTunes Server
- iTunes supported audio formats (mp3, m4a, m4p, wav, aif)
- iTunes supported video formats (m4v, mov, mp4)
- iTunes supported playlist formats (m3u, wpl)
- TiVo Archiving (varies by model and region)
- Plex Media Server streams to DLNA and Plex clients

Compliance

- ENGR 10049 EST Environmental Stress Test Guideline
- ENGR 10045 EVT Engineering Validation Test Guideline
- ENGR 10048 CVT Compliance Validation Test Guideline
- ENGR 10046 System Validation Test Guideline
- ENGR 10023 HALT Accelerated Life Test Guideline
- ENGR 10036 CDG Component Derating Guideline

Environment

- Noise levels: <28dBA @ 30C (ReadyNAS 516/716), <24.9dBA @ 30C (all other units)
- Operating Temperature: 0-45C
- Operating Humidity: 20-80% relative humidity, non-condensing
- Smart Fan
- Scheduled Power on/off
- UPS Support
- Network UPS with SNMP Management
- Wake on LAN
- Hard drive disk spin down
- Schedule power on/off
- Auto-power on (after shutdown)
- AC Input Power Voltage 100V to 240V
- Power Frequency: 50Hz to 60Hz, Single Phase
- Certification: FCC Class B, CE Class B, RoHS, VCCI Class B

Accessories

• RTRAY05: Replacement/additional 3.5" or 2.5" disk drive tray

Add-on Applications

- One click installation of add-on applications directly through local GUI
- Application available for productivity, media, backup, surveillance, and many others
- NETGEAR applications include Surveillance, Photo Sharing, Advanced configuration tools
- Partner applications include BitTorrent Sync, Plex, Memeo, DVBlink
- Community applications include Transmission, ownCloud, qBittorrent, mySQL, VPN server, Syslog, Wordpress, joomla, Media Wiki, and others
- Application availability subject to change
- Applications may impact overall performance
- Software Development Kit (SDK) available for 3rd party developers

INDUSTRY-LEADING 5-YEAR HARDWARE WARRANTY

5-year next-business-day replacement, 90 day complimentary technical support

NETGEAR, the NETGEAR Logo, ReadyNAS, ReadyCLOUD and X-RAID are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. ©2016 NETGEAR, Inc. All rights reserved.

^{*} including HDD on populated models