

## JOLA hocker chrome



### DESCRIPTION

#### Seat and backrest

- soft upholstered seat

#### Frame

- chromium plated or powder coated metal frame

#### Other

- comfortable footrest

### FINISHES

#### METAL ELEMENTS (chrome/alu/silver)



**CHROME**



**ALU**

## MICRO



**Composition:** 100% polyester

**Weight:** 160 g/m<sup>2</sup>

**Abrasion Resistance:** 50 000 Martindale cycles

**Flammability:** EN 1021-1, EN 1021-2

**Other:**

EN 71-1 safety of toys (mechanical and physical properties)

EN 71-2 safety of toys (flammability)

EN 71-3 safety of toys (migration of certain elements)

## LEATHER IMITATION V



**Composition:** 100% polyester PVC coated


**Weight:** 460 g/m<sup>2</sup>

**Abrasion Resistance:**  $\geq$ 30 000 Martindale cycles

**Flammability:** the selected colours (marked as N) are fire resistant according to EN 1021-1, EN 1021-2, BS 5852-1

**Other:** easy to keep clean

## OBAN

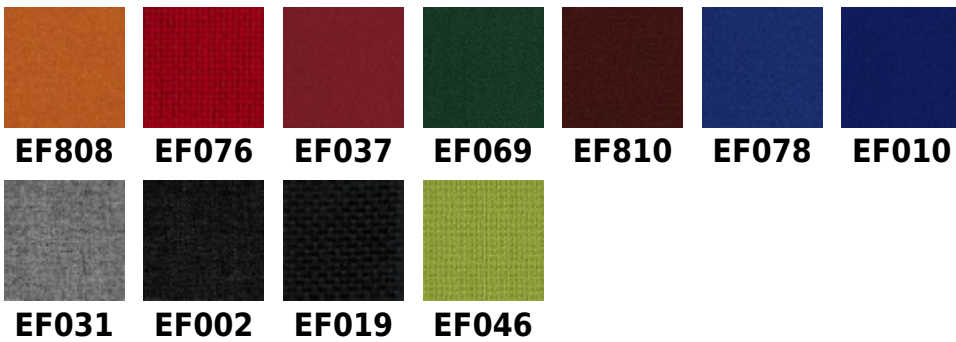

**Composition:** 100% polypropylene

**Weight:** 230 g/m<sup>2</sup>

**Abrasion Resistance:** grade A tested in accordance with EN 14465:2003

**Flammability:** EN 1021-1

**Other:** hygienic certificate by National Hygiene Institute in Poland

### LUCIA



**Composition:** 100% polyester


**Weight:** 260g/m<sup>2</sup>

**Abrasion Resistance:** 50 000 Martindale cycles

**Flammability:** EN 1021-1, EN 1021-2, BS 7176 low hazard, BS 476 Class 1

**Other:** Recycled EU Flower Certified

### BASIC FABRIC C

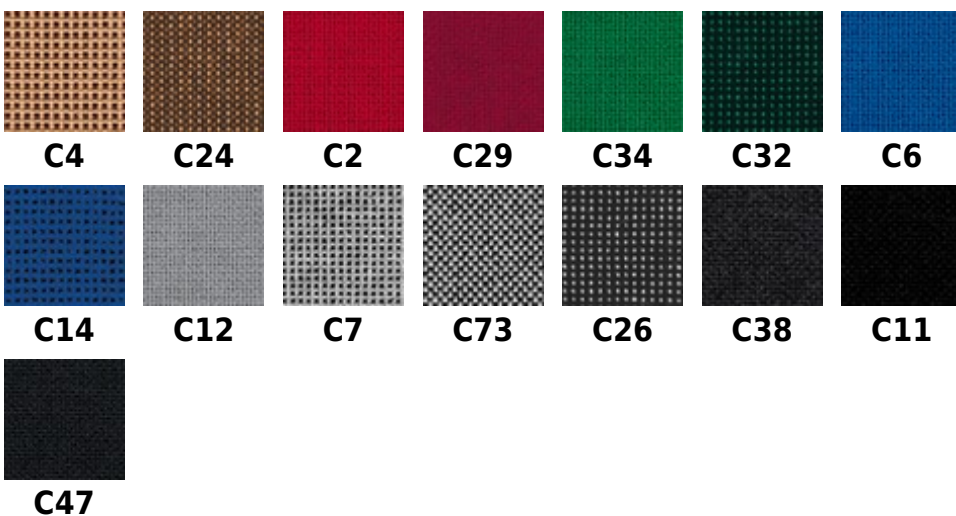

**Composition:** 100% synthetic fibre

**Weight:** 225 g/m<sup>2</sup>

**Abrasion Resistance:** >=35 000 Martindale cycles

## BONDAI



**Composition:** 100% polyester

**Weight:** 250 g/m<sup>2</sup>

**Abrasion Resistance:** 150 000 Martindale cycles

**Flammability:** EN 1021-1, EN 1021-2, BS 7176 medium hazard, BS 5852 Crib 5

## KAIMAN



**Composition:** upper layer: 100% polyurethane  
bottom layer: 70% polyester, 30% cotton

**Weight:** 435 g/m<sup>2</sup>

**Abrasion Resistance:** 100 000 Martindale cycles

**Flammability:** BS 5885 Source 0

**Other:** Hydrolisis (DIN EN ISO 32100 (DIN 53351) / DIN 53359) - 15 000 revs

## SEMPRE



**Composition:** 100% polyester

**Weight:** 366 g/m<sup>2</sup>


**Abrasion Resistance:** 160 000 Martindale cycles

**Flammability:** EN 1021-1, EN 1021-2

**Other:** hygienic certificate by National Hygiene Institute in Poland

## DIMENSIONS

---

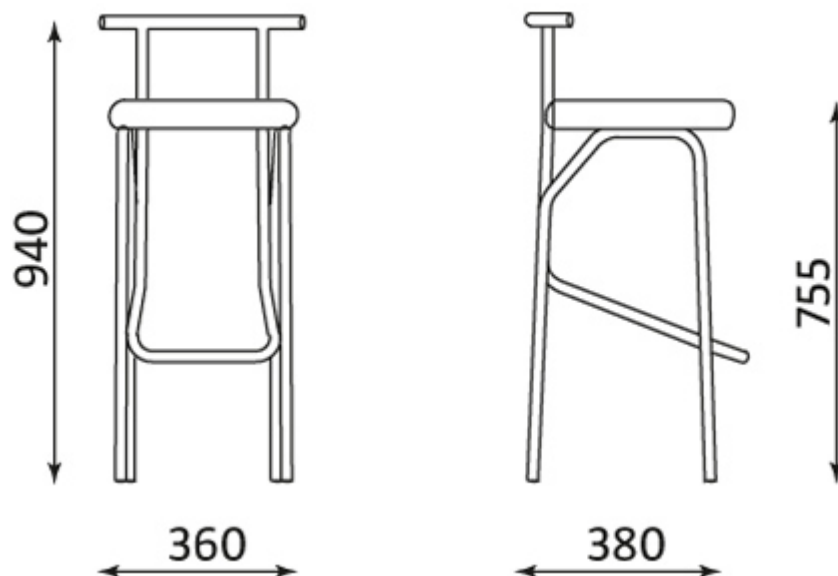

All rights reserved 2013 Nowy Styl Group

---

### **CONTACT**

Nowy Styl Sp. z o.o.  
Pużaka 49  
38-400 Krosno  
Tel. +48 13 43 76 100  
Fax +48 13 43 62 732  
info@nowystylgroup.com

### **Export Department**

Mięsowicza 6  
38-400 Krosno  
Poland  
Tel. +48 13 43 76 111  
export@nowystylgroup.com

### **Marketing Department**

Warszawska 15  
32-086 Węgrzce  
Poland  
Tel. +48 12 63 98 602