




GE
Lighting

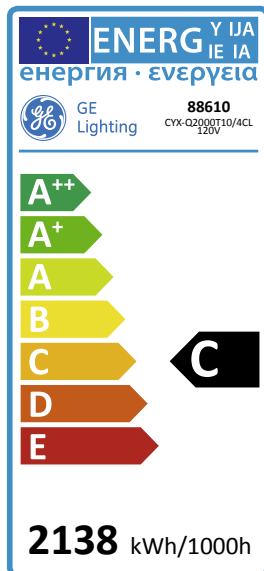

2138
kWh/1000h

C
energy class

30
lumens/watt

Single Ended Halogen CYX-Q2000T10/4CL 120V **88610**

Product information

Quartzline® lamps designed for optimum performance in today's precision range of stage, studio and architectural luminaires. Full range up to 24,000 W
-Range of bases to meet the needs of OEMs -
Chromised seal protection up to 500° C.

Application areas



Theatre



Film and Broadcast



Product data

Cap/Base	G38
Bulb Shape	Tubular
Bulb Diameter [mm]	32
Maximum Overall Length [mm]	216
Light Center Length [mm]	127
Net weight per piece [g]	189
Gross weight per piece [g]	330
Brand	General Electric (GE)

Performance data

Colour Rendering Index (CRI) [Ra]	100
Nominal correlated colour temperature (CCT) [K]	3200
Nominal lumens [lm]	59000
Energy efficiency class (EEC)	C
Rated Life [h]	400
Weighted energy consumption [kWh/1000h]	2137.17

Electrical data

Nominal power [W]	2000
Nominal lamp voltage [V]	120
Coil type	C-13
Dimming Capability	Yes
Ballast Required	Yes

Logistic data

DUN Code	10043168886106
EAN Code	0043168886109
Pack Quantity	6
Layer quantity	216 EUR, 270 UK
Layer quantity EUR	216
Layer quantity UK	270
Pallet quantity EUR (PC)	864
Pallet quantity UK (PC)	1080
Outer case size	190 x 130 x 230 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Special Purpose Lamp, Not suited for household illumination