





GE Start GLS

LED10/A60/827/100-240V/B22/F HBX1/6

71112

Product information

A new range of highly competitive LED GLS products with up to an incredible 1500 lumen output. Consuming only 7W, 10W and 13W and 16W power, they are a fantastic energy saving alternative to traditional GLS lamps with new, high quality aesthetics.

Application areas





(A) Hospitality









Product data

Cap/Base	B22
Bulb Shape	GLS
Bulb Finish	White
Bulb Diameter [mm]	60
Bulb maximum overall diameter [mm]	62
Maximum Overall Length [mm]	108
Net weight per piece [g]	156
Gross weight per piece [g]	189
Brand	General Electric (GE)

Performance data

Colour Rendering Index (CRI) [Ra]	80
Nominal correlated colour temperature (CCT) [K]	2700
Nominal lumens [lm]	810
Rated Lumens [lm]	810
Nominal useful lumens [lm]	810
Energy efficiency class (EEC)	A+
Rated life L70/B50 [h]	25000
Weighted energy consumption [kWh/1000h]	10





Electrical data

10
10.0
0.9
230
0.115
80
<0.5
<0.5
100000
No


Logistic data

DUN Code	10043168711125
EAN Code	0043168711128
Pack Quantity	6
Inner pack type	HANGING BOX
Outer pack type	OUTER BOX
Layer quantity	126 EUR, 168 UK
Layer quantity EUR	126
Layer quantity UK	168
Pallet quantity EUR (PC)	1050
Pallet quantity UK (PC)	1344
Outer case size	229 x 153 x 154 (mm)
Product status	Available





Technical drawing

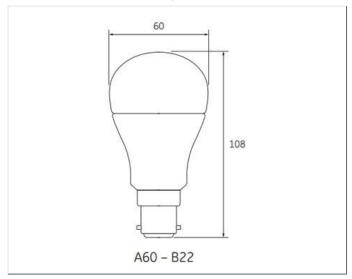

Downloads & Links

Go to the catalog site (HTTP)

Product datasheet (PDF)

LED Lighting Solutions - Catalogue (EN) (PDF)

Lighting design tools & calculators (HTTP)

Datasheets (HTTP)

High-res images / Technical drawings (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)