



# T5 LongLast™ - High Efficiency, G5 Cap FT5/28W/827/GE/LL/SL1/30 61095



# **Product information**

T5 LongLast<sup>™</sup> lamps are triphosphor fluorescent lamps with 16mm outer diameter (5/8 of an inch). These lamps feature "Starcoat<sup>™</sup> Technology" that delivers high quality triphosphor performance. GE produces two ranges of T5 LongLast<sup>™</sup> lamps in 4 different lengths:

- High Efficiency offering high lumens per watt
- High Output offering improved lumen package

#### **Application areas**




Education

Retail

) Industrial



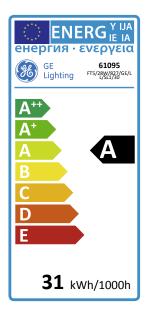





## Product data

| Cap/Base                           | G5                    |
|------------------------------------|-----------------------|
| Bulb Shape                         | Tubular               |
| Bulb Diameter [mm]                 | 16                    |
| Bulb maximum overall diameter [mm] | 16                    |
| Cap to Cap Length (Max) [mm]       | 1149                  |
| Net weight per piece [g]           | 101                   |
| Gross weight per piece [g]         | 130                   |
| Mercury Content [mg]               | 2.5                   |
| UV radiance                        | Exempt                |
| Regulatory comment                 | EUP related           |
| Brand                              | General Electric (GE) |

## Performance data

| Colour Code                                                           | 827   |
|-----------------------------------------------------------------------|-------|
| Colour Rendering Index (CRI) [Ra]                                     | 85    |
| Nominal correlated colour temperature (CCT) [K]                       | 2700  |
| Nominal lumens [lm]                                                   | 2900  |
| Lumen at 25°C [lm]                                                    | 2640  |
| Rated efficacy [lm/W]                                                 | 104   |
| Energy efficiency class (EEC)                                         | A     |
| Rated Life [h]                                                        | 30000 |
| Rated median life on electronic (HF) ballast on IEC 12-<br>hour cycle | 36000 |
| Rated median life on electronic (HF) ballast on IEC 3-<br>hour cycle  | 30000 |
| Weighted energy consumption [kWh/1000h]                               | 30.94 |





# **Electrical data**

| Nominal power [W]                    | 28  |
|--------------------------------------|-----|
| Design Ambient Temperature [°C]      | 35  |
| Design Lamp ambient temperature [°C] | 35  |
| Starting ambient temperature range   | -15 |
| Dimming Capability                   | Yes |


## Logistic data

| DUN Code                 | 10043168610954        |
|--------------------------|-----------------------|
| EAN Code                 | 0043168902526         |
| Pack Quantity            | 30                    |
| Inner pack type          | SLEEVE                |
| Outer pack type          | OUTER BOX             |
| Layer quantity           | 180 EUR, 240 UK       |
| Layer quantity EUR       | 180                   |
| Layer quantity UK        | 240                   |
| Pallet quantity EUR (PC) | 1800                  |
| Pallet quantity UK (PC)  | 2400                  |
| Outer case size          | 1190 × 120 × 102 (mm) |
| Product status           | Available             |






#### **Technical drawing**

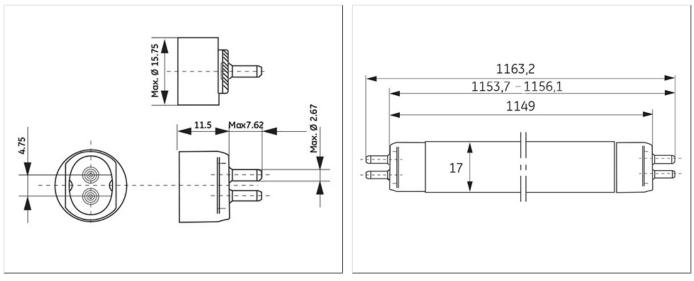


#### Lumen maintenance data

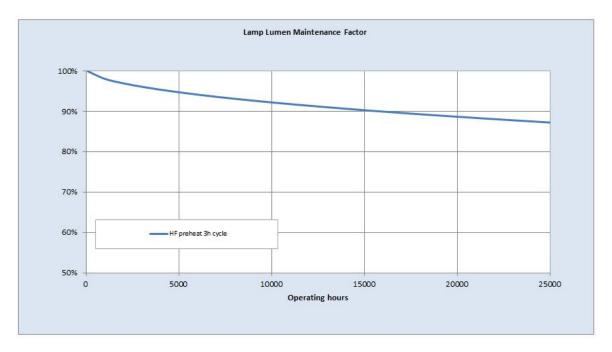






#### Survival data

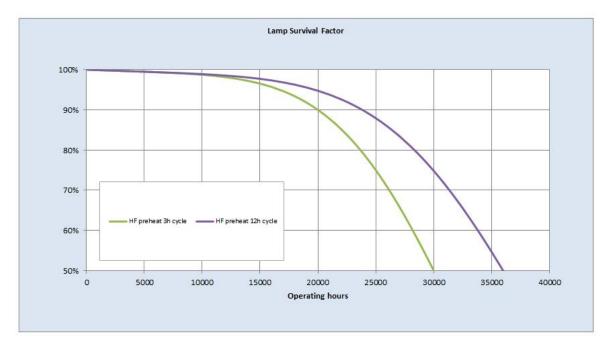

#### Service life data

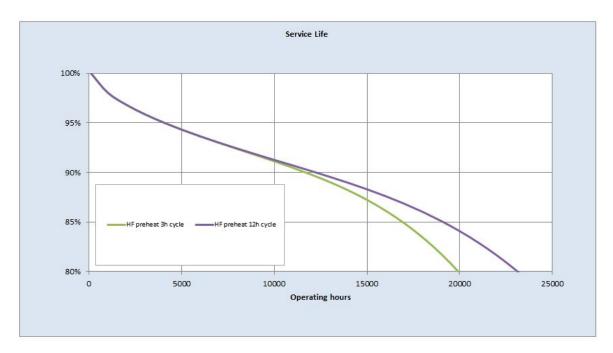





#### **Downloads & Links**

Go to the catalog site (HTTP) Linear Fluorescent Lamps Catalogue (PDF) LFL T5 LongLast™ Lamps - Data sheet (EN) (PDF) Lighting design tools & calculators (HTTP) High-res images / Technical drawings (HTTP) Certificate for the Quality Management System of GE Lighting EMEA (PDF) Certificate for the Environmental Management System of GE Lighting EMEA (PDF)