




GE
Lighting

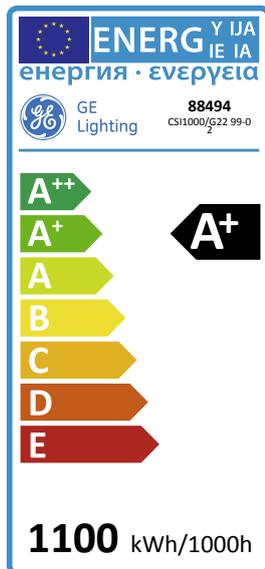

1100
kWh/1000h

A+
energy class

90
lumens/watt

CSI/CID
CSI1000/G22 99-02
88494

Product information

A range of discharge lamps from 400 to 1000W giving high lumen for a variety of specialist applications in single ended and PAR format.

Application areas



Other



Product data

Cap/Base	G22
Bulb Shape	Tubular
Bulb Finish	Clear
Bulb Diameter [mm]	32
Maximum Overall Length [mm]	115
Arc Gap	14
Net weight per piece [g]	135
Gross weight per piece [g]	160
Operating position	U - Universal
Brand	General Electric (GE)

Performance data

Colour Code	840
Colour Rendering Index (CRI) [Ra]	80
Nominal correlated colour temperature (CCT) [K]	4000
Nominal lumens [lm]	90000
Energy efficiency class (EEC)	A+
Nominal chromaticity coordinate X	0.395
Nominal chromaticity coordinate Y	0.395
Weighted energy consumption [kWh/1000h]	1100

Electrical data

Nominal power [W]	1000
Nominal lamp voltage [V]	80
Lamp Current [A]	15
Startup time [sec]	30
Dimming Capability	No
Ballast Required	Yes

Logistic data

DUN Code	10043168884942
EAN Code	5021731314025
Pack Quantity	1
Layer quantity	162 EUR, 210 UK
Layer quantity EUR	162
Layer quantity UK	210
Pallet quantity EUR (PC)	1458
Pallet quantity UK (PC)	1890
Outer case size	245 x 135 x 110 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Special Purpose Lamp, Not suited for household illumination