




GE  
Lighting

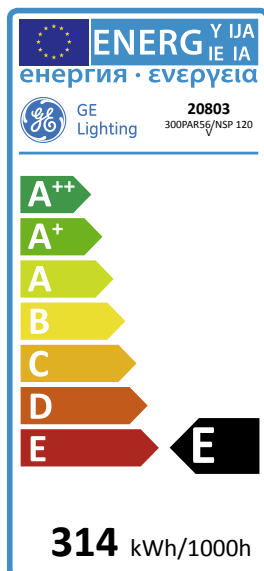

314  
kWh/1000h

E  
energy class

13  
lumens/watt

## PAR 56 300PAR56/NSP 120V 20803

### Product information

PAR lamps provide a robust and flexible design solution for a wide range of applications. Choice of PAR36, PAR46, PAR56 or PAR64

- 3000 K or 4200 K colour temperature
- Choice of beam widths
- Excellent colour rendering
- High efficiency combined with low operating costs
- Robust and reliable
- UV control
- Easy retrofit
- Colour consistent throughout life
- Colour blends with halogen and fluorescent

### Application areas



Club and Disco



## Product data

Cap/Base	G16d
Bulb Shape	PAR
Bulb Finish	Aluminized
Bulb Diameter [mm]	177.8
Maximum Overall Length [mm]	127
Net weight per piece [g]	648
Gross weight per piece [g]	650
Brand	General Electric (GE)

## Performance data

Nominal correlated colour temperature (CCT) [K]	2750
Nominal beam angle [°]	19
Nominal center beam candlepower (CBCP) [cd]	68000
Nominal lumens [lm]	3840
Energy efficiency class (EEC)	E
Rated Life [h]	2000
Weighted energy consumption [kWh/1000h]	313.36

## Electrical data

Nominal power [W]	300
Nominal lamp voltage [V]	120
Coil type	CC-13
Ballast Required	Yes

## Logistic data

DUN Code	00043168208031
Pack Quantity	12
Layer quantity	96 EUR, 132 UK
Layer quantity EUR	96
Layer quantity UK	132
Pallet quantity EUR (PC)	192
Pallet quantity UK (PC)	324
Outer case size	349 x 300 x 446 (mm)
Product status	Available

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

## Disclaimer

Special purpose lamp – Stage Studio. Not suitable for household illumination.