




GE
Lighting

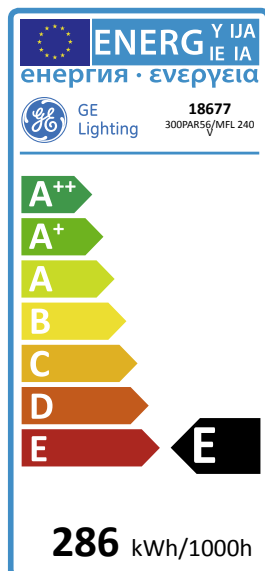

286
kWh/1000h

E
energy class

12
lumens/watt

PAR 56
300PAR56/MFL 240V
18677

Product information

PAR lamps provide a robust and flexible design solution for a wide range of applications. Choice of PAR36, PAR46, PAR56 or PAR64

- 3000 K or 4200 K colour temperature
- Choice of beam widths
- Excellent colour rendering
- High efficiency combined with low operating costs
- Robust and reliable
- UV control
- Easy retrofit
- Colour consistent throughout life
- Colour blends with halogen and fluorescent

Application areas



Club and Disco



Product data

Cap/Base	GX16d
Bulb Shape	PAR
Bulb Finish	Aluminized
Bulb Diameter [mm]	177.8
Maximum Overall Length [mm]	127
Net weight per piece [g]	623
Gross weight per piece [g]	692
Brand	General Electric (GE)

Performance data

Nominal correlated colour temperature (CCT) [K]	2750
Nominal beam angle [°]	21
Nominal lumens [lm]	3450
Energy efficiency class (EEC)	E
Rated Life [h]	2000
Weighted energy consumption [kWh/1000h]	285.58

Electrical data

Nominal power [W]	300
Nominal lamp voltage [V]	245
Coil type	CC-13
Ballast Required	No

Logistic data

DUN Code	00043168186773
EAN Code	0043168186773
Pack Quantity	12
Layer quantity	64 EUR, 88 UK
Layer quantity EUR	64
Layer quantity UK	88
Pallet quantity EUR (PC)	192
Pallet quantity UK (PC)	264
Outer case size	349 x 300 x 446 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Special purpose lamp – Stage Studio. Not suitable for household illumination.