




GE  
Lighting

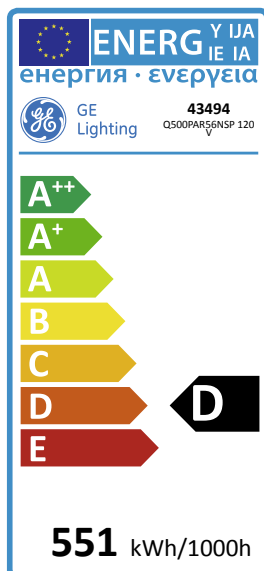

551  
kWh/1000h

D  
energy class

15  
lumens/watt

## PAR 56 Q500PAR56NSP 120V 43494

### Product information

PAR lamps provide a robust and flexible design solution for a wide range of applications. Choice of PAR36, PAR46, PAR56 or PAR64

- 3000 K or 4200 K colour temperature
- Choice of beam widths
- Excellent colour rendering
- High efficiency combined with low operating costs
- Robust and reliable
- UV control
- Easy retrofit
- Colour consistent throughout life
- Colour blends with halogen and fluorescent

### Application areas



Club and Disco



## Product data

Cap/Base	G16d
Bulb Shape	PAR
Bulb Diameter [mm]	177.8
Maximum Overall Length [mm]	127
Net weight per piece [g]	678
Gross weight per piece [g]	737
Brand	General Electric (GE)

## Performance data

Colour Rendering Index (CRI) [Ra]	100
Nominal correlated colour temperature (CCT) [K]	2950
Nominal beam angle [°]	19
Nominal center beam candlepower (CBCP) [cd]	96000
Nominal lumens [lm]	7650
Energy efficiency class (EEC)	D
Rated Life [h]	4000
Weighted energy consumption [kWh/1000h]	550.11

## Electrical data

Nominal power [W]	500
Nominal lamp voltage [V]	120
Coil type	CC-6
Ballast Required	Yes

## Logistic data

DUN Code	00043168434942
EAN Code	0043168434942
Pack Quantity	6
Inner pack type	BOX
Layer quantity	72 EUR, 108 UK
Layer quantity EUR	72
Layer quantity UK	108
Pallet quantity EUR (PC)	216
Pallet quantity UK (PC)	324
Outer case size	446 x 300 x 349 (mm)
Product status	Available

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

## Disclaimer

Special purpose lamp – Stage Studio. Not suitable for household illumination.