




GE  
Lighting

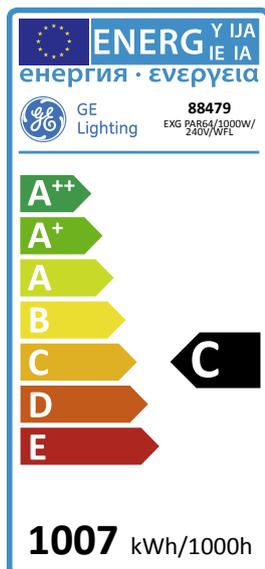

1007  
kWh/1000h

C  
energy class

PAR 64

EXG PAR64/1000W/240V/WFL

88479

## Product information

PAR lamps provide a robust and flexible design solution for a wide range of applications. Choice of PAR36, PAR46, PAR56 or PAR64

- 3000 K or 4200 K colour temperature
- Choice of beam widths
- Excellent colour rendering
- High efficiency combined with low operating costs
- Robust and reliable
- UV control
- Easy retrofit
- Colour consistent throughout life
- Colour blends with halogen and fluorescent

## Application areas



Club and Disco



## Product data

Cap/Base	GX16d
Bulb Shape	PAR
Bulb Diameter [mm]	204
Maximum Overall Length [mm]	150
Light Center Length [mm]	80
Net weight per piece [g]	982
Gross weight per piece [g]	1072
Brand	General Electric (GE)

## Performance data

Colour Rendering Index (CRI) [Ra]	100
Nominal correlated colour temperature (CCT) [K]	3200
Nominal beam angle [°]	30
Nominal center beam candlepower (CBCP) [cd]	38000
Energy efficiency class (EEC)	C
Rated Life [h]	300
Weighted energy consumption [kWh/1000h]	1006.14

## Electrical data

Nominal power [W]	1000
Nominal lamp voltage [V]	240
Coil type	C-13
Dimming Capability	Yes
Ballast Required	No

## Logistic data

DUN Code	10043168884799
EAN Code	0043168884792
Pack Quantity	6
Inner pack type	BOX
Outer pack type	OUTER BOX
Layer quantity	24 EUR, 30 UK
Layer quantity EUR	24
Layer quantity UK	30
Pallet quantity EUR (PC)	120
Pallet quantity UK (PC)	150
Outer case size	536 x 391 x 196 (mm)
Product status	Available

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

## Disclaimer

Special purpose lamp – Stage Studio. Not suitable for household illumination.