




GE
Lighting

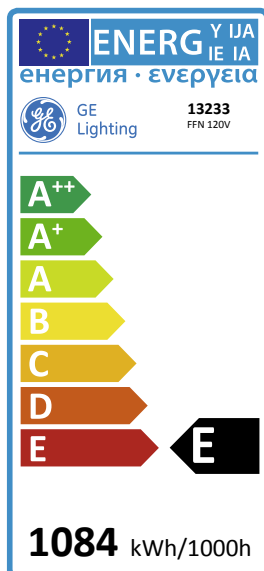

1084
kWh/1000h

E
energy class

28
lumens/watt

PAR 64

FFN 120V

13233

Product information

PAR lamps provide a robust and flexible design solution for a wide range of applications. Choice of PAR36, PAR46, PAR56 or PAR64

- 3000 K or 4200 K colour temperature
- Choice of beam widths
- Excellent colour rendering
- High efficiency combined with low operating costs
- Robust and reliable
- UV control
- Easy retrofit
- Colour consistent throughout life
- Colour blends with halogen and fluorescent

Application areas



Club and Disco



Product data

Cap/Base	G16d
Bulb Shape	PAR
Bulb Diameter [mm]	203.2
Maximum Overall Length [mm]	152.4
Net weight per piece [g]	960
Gross weight per piece [g]	1067
Brand	General Electric (GE)

Performance data

Colour Rendering Index (CRI) [Ra]	100
Nominal correlated colour temperature (CCT) [K]	3200
Nominal beam angle [°]	15
Nominal center beam candlepower (CBCP) [cd]	400000
Nominal lumens [lm]	28000
Energy efficiency class (EEC)	E
Rated Life [h]	800
Weighted energy consumption [kWh/1000h]	1083.58

Electrical data

Nominal power [W]	1000
Nominal lamp voltage [V]	120
Coil type	CC-6
Ballast Required	Yes

Logistic data

DUN Code	00043168132336
EAN Code	0043168132336
Pack Quantity	6
Layer quantity	1 UK
Layer quantity UK	1
Pallet quantity UK (PC)	252
Outer case size	197 x 354 x 551 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Special purpose lamp – Stage Studio. Not suitable for household illumination.