



GE
Lighting

622
kWh/1000h

C
energy class

27
lumens/watt



Double Ended Quartzline TU P2/10 Q625T3/4CL 240/250V MIH **19698**


Product information

Precision range of double ended Quartzline® lamps widely used in theatre and many other applications. A range from 350 W to 2,000 W with 3200K.

Application areas



Theatre

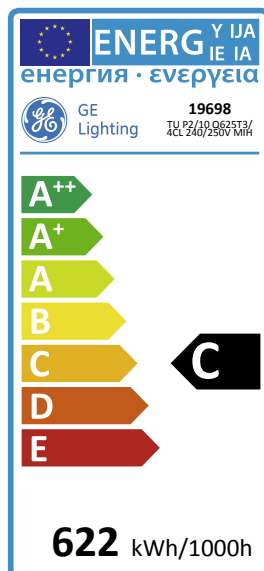

Product data

Cap/Base	R7s
Bulb Shape	Tubular
Bulb Diameter [mm]	10
Maximum Overall Length [mm]	190.6
Net weight per piece [g]	20
Gross weight per piece [g]	46
Brand	General Electric (GE)

Performance data

Colour Rendering Index (CRI) [Ra]	100
Nominal correlated colour temperature (CCT) [K]	3200
Nominal lumens [lm]	16900
Energy efficiency class (EEC)	C
Rated Life [h]	300
Weighted energy consumption [kWh/1000h]	621.29

Electrical data

Nominal power [W]	625
Nominal lamp voltage [V]	245
Coil type	C-8
Dimming Capability	Yes
Ballast Required	No

Logistic data

DUN Code	00043168196987
EAN Code	0043168196987
Pack Quantity	12
Layer quantity	240 EUR, 300 UK
Layer quantity EUR	240
Layer quantity UK	300
Pallet quantity EUR (PC)	1440
Pallet quantity UK (PC)	1800
Outer case size	338 x 114 x 146 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Special Purpose Lamp, Not suited for household illumination