



GE
Lighting



1282
kWh/1000h

C
energy class

28
lumens/watt

Double Ended Quartzline TU P2/12 Q1250T3/4CL 240/250V MIH **19696**


Product information

Precision range of double ended Quartzline® lamps widely used in theatre and many other applications. A range from 350 W to 2,000 W with 3200K.

Application areas



Theatre

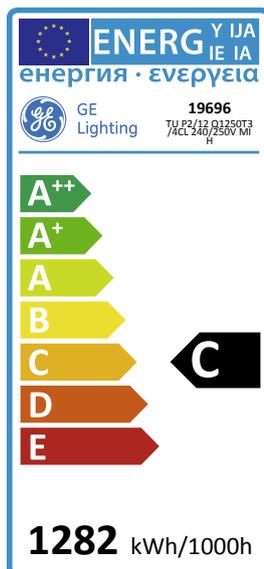

Product data

Cap/Base	R7s
Bulb Shape	Double Ended
Bulb Diameter [mm]	10
Maximum Overall Length [mm]	190.6
Net weight per piece [g]	20
Gross weight per piece [g]	50
Brand	General Electric (GE)

Performance data

Colour Rendering Index (CRI) [Ra]	100
Nominal correlated colour temperature (CCT) [K]	3200
Nominal lumens [lm]	35000
Energy efficiency class (EEC)	C
Rated Life [h]	300
Weighted energy consumption [kWh/1000h]	1281.6

Electrical data

Nominal power [W]	1250
Nominal lamp voltage [V]	245
Coil type	C-8
Ballast Required	No

Logistic data

DUN Code	00043168196963
EAN Code	0043168196963
Pack Quantity	12
Layer quantity	432 EUR, 576 UK
Layer quantity EUR	432
Layer quantity UK	576
Pallet quantity EUR (PC)	864
Pallet quantity UK (PC)	1152
Outer case size	146 x 114 x 332 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Special Purpose Lamp, Not suited for household illumination