




# MX1500

Size: AA (LR6)

Alkaline-Manganese Dioxide Battery for High Tech Devices

Zn/MnO<sub>2</sub>

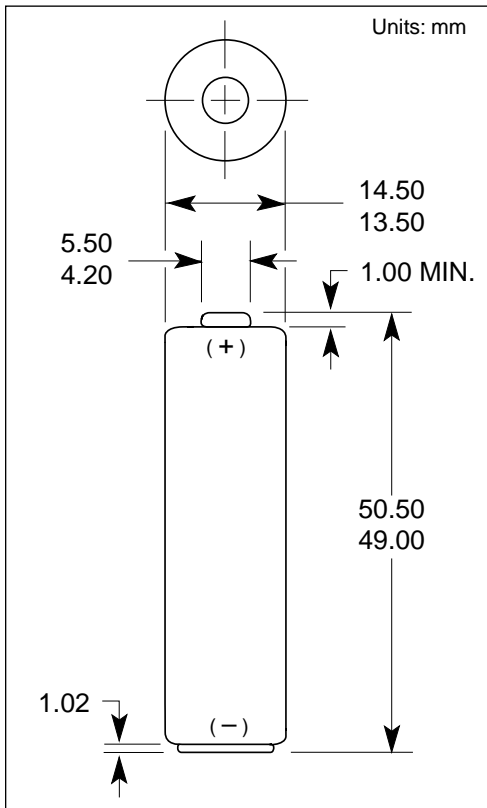


Nominal Voltage: 1.5 Volt  
 Nominal Weight: 23.6 g (0.83 oz.)  
 Nominal Volume: 8.4 cm<sup>3</sup> (0.51 in.<sup>3</sup>)  
 Operating Temp. -20°C to 54°C

## Duracell Ultra:

High Power Alkaline Batteries for High Drain Applications


- Increased energy output at high current loads
- Optimized for use with high power devices
- No trade off in lower power performance
- No dimensional changes

### ULTRA vs. Standard AA Alkaline

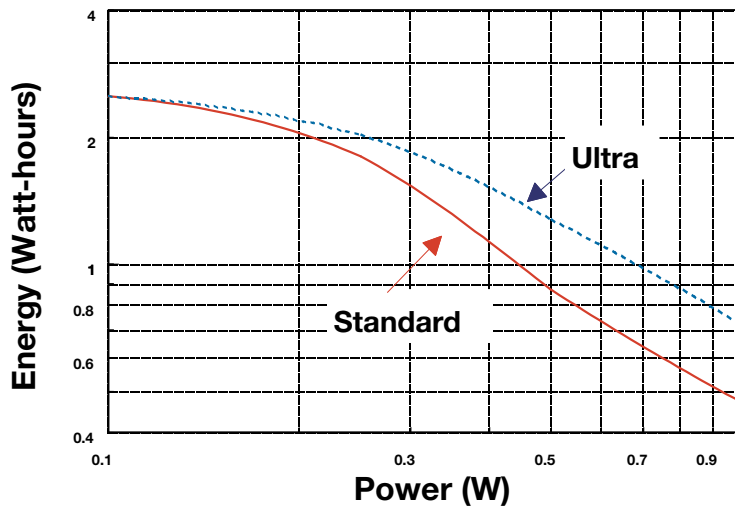


Note: Delivered energy to a 1.0 V end voltage - discharged @ 20°C


### Duracell Ultra Performance vs. Ordinary AA

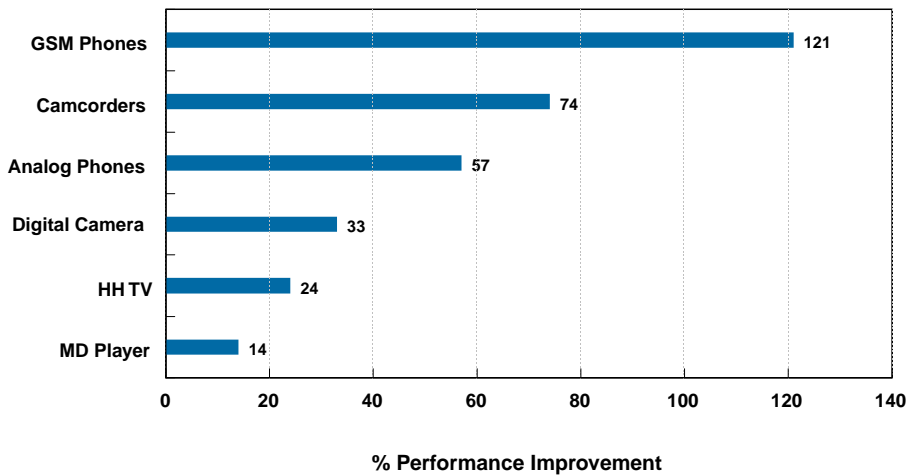


Discharge Characteristics at 20°C (70°F)

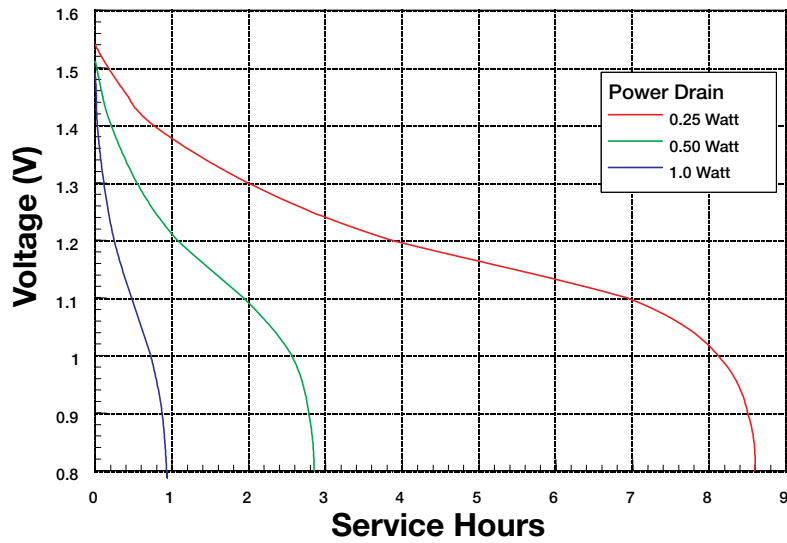


Service Hours vs Power Drain

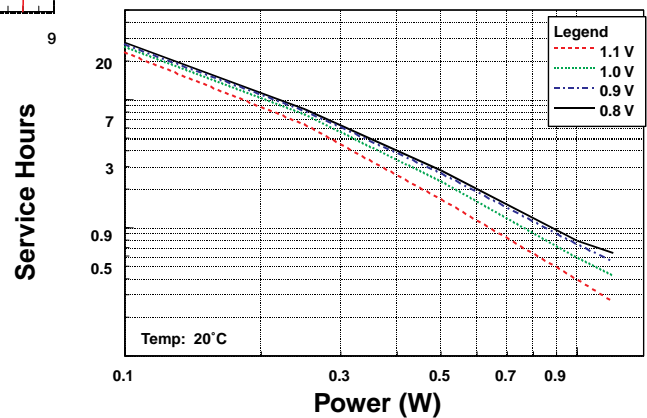

Delivered Energy vs Power Drain

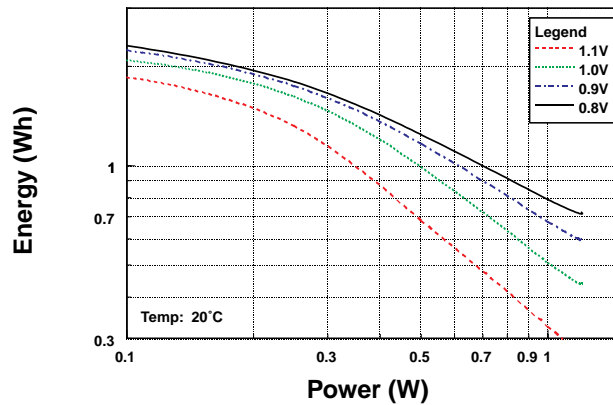

Delivered Capacity vs Power Drain

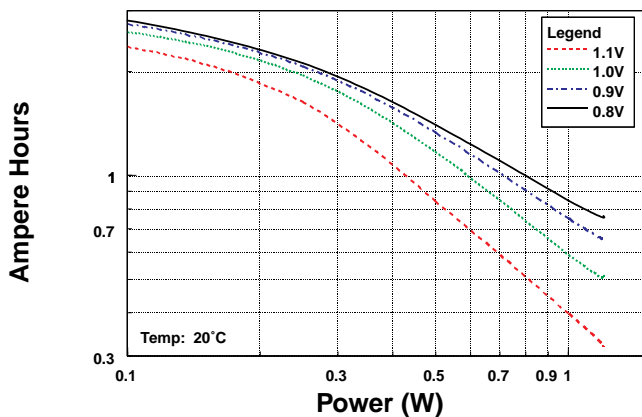

## DURACELL

Berkshire Corporate Park  
 Bethel, CT 06801 U.S.A.  
 Telephone: Toll-free 1-800-431-2656  
 Outside North America: 203-791-3274  
 Facsimile: 203-791-3273  
 Internet: [www.duracellnpt.com](http://www.duracellnpt.com)



Printed in U.S.A. on recycled paper, please recycle after use.

MX1500 - 6/98