

## 2-Port USB 3.0 KVM Switch - HDMI - 4K 60Hz 2-Port USB 3.0 KVM Switch - Dual HDMI - 4K 60Hz

SV231HU34K6

SV231DHU34K6



\*actual product may vary from photos

\*SV231HU34K6 shown above

DE: Bedienungsanleitung - [de.startech.com](http://de.startech.com)

FR: Guide de l'utilisateur - [fr.startech.com](http://fr.startech.com)

ES: Guía del usuario - [es.startech.com](http://es.startech.com)

IT: Guida per l'uso - [it.startech.com](http://it.startech.com)

NL: Gebruiksaanwijzing - [nl.startech.com](http://nl.startech.com)

PT: Guia do usuário - [pt.startech.com](http://pt.startech.com)

For the most up-to-date information, please visit: [www.startech.com](http://www.startech.com)

## **FCC Compliance Statement**

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

## **Industry Canada Statement**

This Class A digital apparatus complies with Canadian ICES-003. Cet appareil numérique de la classe [A] est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (A)/NMB-3(A)

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

## **Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols**

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

# Table of Contents

<b>Introduction</b> .....	<b>1</b>
Packaging Contents .....	1
<b>Product Overview</b> .....	<b>1</b>
Front View (SV231HU34K6) .....	1
Rear View .....	1
Front View (SV231DHU34K6) .....	2
Rear View .....	2
LED Indicators.....	3
<b>Installation</b> .....	<b>3</b>
Attach The Rubber Feet .....	3
Connect the Console .....	3
Connect the PCs.....	3
<b>Operation</b> .....	<b>4</b>
HDCP Switch.....	4
Power-On Sequence.....	4
EDID Button .....	5
Select A Port .....	5
Hot Keys Commands .....	5
<b>Technical Support</b> .....	<b>6</b>
<b>Warranty Information</b> .....	<b>6</b>


# Introduction

## Packaging Contents


- KVM Switch x 1
- Universal Power Adapter (NA/JP, EU, UK, ANZ) x 1
- Rubber Feet x 4
- Quick-Start Guide x 1

## Product Overview


### Front View (SV231HU34K6)

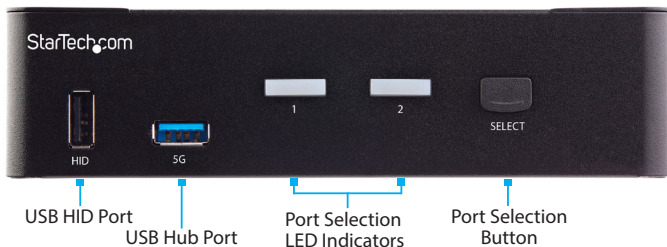


### Rear View

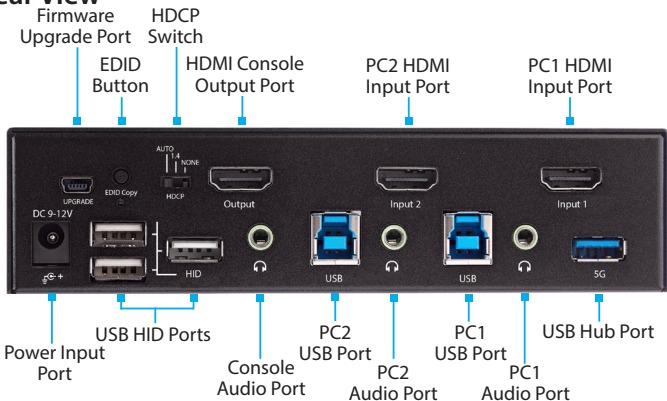

## Front View (SV231DHU34K6)

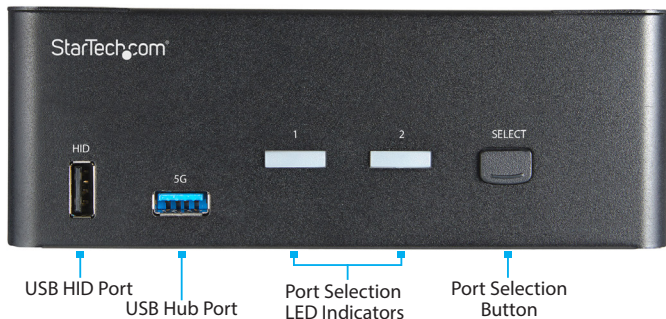

## Rear View

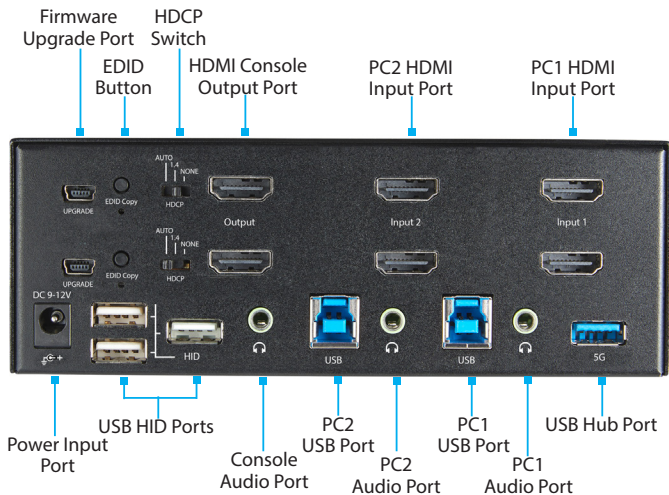

# LED Indicators

## PC Selection Indicators

Green = PC Connected

Red = Port selected

## EDID LED Indicator

2x Fast Flashes = EDID Copy mode

3x Slow Flashes = Auto EDID

3x Fast Flashes = Default Setting

# Installation

## Attach The Rubber Feet

To affix the **Rubber Feet** to the bottom of the **KVM switch**, peel off the backing on each of the four **Rubber Feet** and adhere them to the bottom of the **KVM Switch**, in the indicated areas.

## Connect the Console

1. Power off the **HDMI Display** and any **Peripherals** before connecting to the **KVM Switch**.
2. Connect 1 (SV231HU34K6) or 2 (SV231DHU34K6) **HDMI Display(s)** to the **Console HDMI Output Port(s)**, located on the rear of the **KVM Switch**.
3. Connect a **USB Keyboard** and a **USB Mouse** to the **Console USB HID Ports**, located on the rear of the **KVM Switch**.
4. (Optional) Connect an additional **USB HID Device** to the remaining **Console USB HID Port**, located on the front of the **KVM Switch**.
5. (Optional) Connect the **Audio Device** to the **Console Audio Port**, located on the rear of the **KVM Switch**.
6. (Optional) Connect up to two **SuperSpeed USB 5Gbps (USB 3.2 Gen 1) Peripheral Devices** to the **Console USB Hub Ports**, located on the front and rear of the **KVM Switch**.

## Connect the PCs

1. Power off the **Computer** and any **Peripherals** before connecting to the **KVM Switch**.
2. Connect 1 (SV231HU34K6) or 2 (SV231DHU34K6) **HDMI Cable(s)** from the **HDMI Port(s)** on the **Computer** to the **PC 1 HDMI Input Port(s)** on the rear of the **KVM Switch**.
3. Connect a **SuperSpeed USB 5Gbps (USB 3.2 Gen 1) Cable** (Type-A Male to Type-B Male) from the **USB-A Port** on the **Computer** to the **PC 1 USB Port** on the rear of the **KVM Switch**.

*Note: A SuperSpeed USB 5Gbps (or better) Cable is recommended for optimal performance.*

- (Optional) Connect a **3.5 mm Audio Cable** from the **Audio Port** on the **Computer** to the corresponding **PC 1 Audio Port** on the rear of the **KVM Switch**.
- Repeat **Steps 1 to 4** for **PC 2**.

## Operation

### HDCP Switch

*Note: If the HDCP version needs to be changed after the initial installation, a power cycle of the KVM and connected devices may be required.*

The **HDCP Switch**, located on the rear of the **KVM Switch**, is used to set the **HDCP** version the **KVM Switch** will use with connected devices. The **HDCP Switch** can select one of three different modes:

**Auto** – This mode makes the **KVM Switch** detect the highest compatible **HDCP** version between **Source** and **Display**, and will then use that mode. This mode is recommended for most setups.

**1.4** - This mode forces **HDCP 1.4** between the connected **Source** and **Display Devices**, which may limit video performance. This mode should be used if you experience issues getting video to pass through the **KVM Switch**, as it can help with older device compatibility.

**None** – This mode disables the **HDCP** handshake between the connected devices and the **KVM Switch**, which means protected content will not passthrough the **KVM Switch**.

### Power-On Sequence

- Connect the **Universal Power Adapter** from a **Wall Outlet** to the **Power Input Port** on the rear of the **KVM Switch**.
- Power on all **Peripherals**.
- Select **PC 1** and power on the corresponding **Computer**.

*Note: Ensure that the Computer connected to the PC 1 ports has fully booted to the operating system before proceeding.*

- Repeat **Step 3** for **PC 2**.

## EDID Button

The **EDID Button**, located on the rear of the **KVM Switch**, is used to set how the **KVM Switch** will handle **EDID** information. There are three different modes available:

Mode	How to Enable
EDID Copy	Press and hold the EDID button for 3 Seconds
EDID Auto	Press and hold the EDID button for 6 Seconds
Default EDID	Press and hold the EDID button for 12 Seconds

**EDID Copy** - This mode holds the **EDID** information of the current **display** and will always use that **EDID** information, even if another **Display** is connected instead. This can help if experiencing compatibility issues with the **Display** intended for the setup.

**EDID Auto** - This mode causes the **KVM Switch** to read, store, and forward the **EDID** to the **Source Device** ports. This ensures switching between ports does not require re-transmission of the **EDID** to detect capabilities.

**Default EDID** - This mode will set the **KVM Switch** to default to an **EDID** of 1080p. This means monitors with a higher resolution may not see those resolutions available.

## Select A Port

To select a port, press the **Port Selection Button**, located on the front of the **KVM Switch**, until the desired **Computer** has been selected.

***Note:** When you switch between ports, it takes some time for the video signal to be communicated. After you select a port, wait three to four seconds before you select a different port.*

## Hot Keys Commands

To view detailed instructions on the use of Hot Key Commands, please visit:

[www.StarTech.com/SV231HU34K6](http://www.StarTech.com/SV231HU34K6)

[www.StarTech.com/SV231DHU34K6](http://www.StarTech.com/SV231DHU34K6)



# Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit [www.startech.com/support](http://www.startech.com/support) and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit [www.startech.com/downloads](http://www.startech.com/downloads)

## Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

### Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

## Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions.

We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit [www.StarTech.com](http://www.StarTech.com) for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.

### Reviews

Share your experiences using StarTech.com products, including product applications and setup, what you love about the products, and areas for improvement.

StarTech.com Ltd.	StarTech.com LLP	StarTech.com Ltd.	StarTech.com Ltd.
45 Artisans Crescent London, Ontario N5V 5E9 Canada	4490 South Hamilton Road Groveport, Ohio 43125 U.S.A.	Unit B, Pinnacle 15 Gowerton Road Brackmills, Northampton NN4 7BW United Kingdom	Siriusdreef 17-27 2132 WT Hoofddorp The Netherlands

FR: [fr.startech.com](http://fr.startech.com)

ES: [es.startech.com](http://es.startech.com)

IT: [it.startech.com](http://it.startech.com)

DE: [de.startech.com](http://de.startech.com)

NL: [nl.startech.com](http://nl.startech.com)

JP: [jp.startech.com](http://jp.startech.com)