

Designation:..... 18647 101 401

Input:..... DC5V, 1000mA – 2400mA

Battery Requirement: 2 x 18650 Li-Ion Battery
 Li-ion 3.6V 5200mAh (2x2600mAh) 18.72Wh Battery

Lamp required:..... 1pcs Konglighting 12w COB cool white LED

Luminous intensity:..... High 1450 lm
 Mid 800 lm
 Low 200 lm

Range 45 m max high / 30m mid / 15m low


Weight: 437.6 g

Material:..... PC (Polycarbonate)
 ABS
 TPR
 POM
 All contact parts made of bronze or nickel plated steel

Dimensions: **Height (A): 158.7 mm**
Length (B): 199.4 mm
Max Width (C): 125 mm (90°)
Min Width (D) 41.6mm (folden)

Run Time: High: 2.5h
 with fully charged Mid: 4.5h
 Low 15h

Charging Time: 5V 1A ≤ 8h / 5V 2.4A ≤ 4h

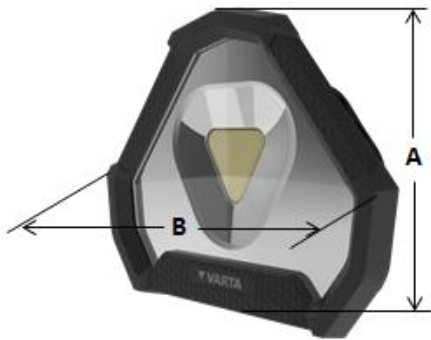

Features (Technical):

Super bright 12W COB Area light

Powerful cool white area light for ultra-wide-view

MCU control multiple functions push switch(High/Mid/Low/Off)

4seconds memory wipe: Reset mode to off or reset off to high mode if longer than 4seconds

User display status discharging: Blue LED indicator "1HZ flashes" when charging<100%;
Solid blue ON when fully charged

User display status discharging: Red LED: 3flashes @2HZ-off for 2secs-repeat
(Low battery remind when<5%)

Simultaneous Charge: Plug in MicroUSB->Lowmode->Pull out MicroUSB->Recover
to "Highmode" ->Off
Reset to High/Mid/Low/Off (memory wipe)

180° handle rotation: 7Position adjustable folding in place (0,30°, 60°, 90°, 120°, 180°)

Charging circuit with protection for over-charged & over-discharged

2meters drop test

IPX54 dust resistant&water resistant

10,000 Switch cycle life

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries