



GE
Lighting

65
kWh/1000h


A
energy class

56
lumens/watt

ConstantColor™ CMH AR111

CMH70/R111/UVC/930/GX8.5/FL24

99993

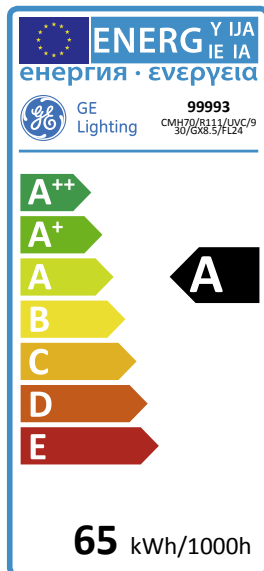

Product information

GE's **CMH-AR111** are an ideal choice for energy-efficient accent and display lighting. The decorative design provides excellent beam control with low glare and superb overall light quality. It is now possible to achieve lighting designs with much lower thermal output than tungsten halogen lamps of similar light output. Now, anyone with critical colour needs can enjoy the excellent savings that CMH-AR111 lamps provide. CMH-AR111 lamps offer substantial benefits that make them the clear choice for specification into new stores, or re-lamping existing store fixtures.

Application areas



Retail



Industrial



WORLDWIDE PARTNER

Product data

Cap/Base	GX8.5
Bulb Shape	Reflector
Bulb Finish	Clear
Bulb Diameter [mm]	111
Maximum Overall Length [mm]	95
Net weight per piece [g]	79
Gross weight per piece [g]	129
Operating position	U (ECG) / V60 (EM)
Mercury Content [mg]	4.9
Brand	General Electric (GE)

Performance data

Colour Rendering Index (CRI) [Ra]	88
Nominal correlated colour temperature (CCT) [K]	3000
Nominal beam angle [°]	24
Rated beam angle [°]	20.81
Nominal center beam candlepower (CBCP) [cd]	18000
Rated peak intensity in [Cd]	18000
Nominal lumens [lm]	3900
Rated Lumens [lm]	3636
Nominal useful lumens [lm]	3636
Rated useful lumens [lm]	3636
Nominal efficacy [LpW]	56
Rated efficacy [LpW]	49.8
Energy efficiency class (EEC)	A
Rated average life [h]	12000
Nominal chromaticity coordinate X	0.431
Nominal chromaticity coordinate Y	0.4
Weighted energy consumption [kWh/1000h]	64.24


Electrical data

Nominal power [W]	70
Rated power [W]	73.0
Nominal lamp voltage [V]	95
Lamp Current [A]	1
Run-up time (sec)	<150
Hot restart time (sec)	<900
Dimming Capability	No


Logistic data

DUN Code	10043168999936
EAN Code	0043168999939
Pack Quantity	6
Inner pack type	BOX
Outer pack type	OUTER BOX
Layer quantity	96 EUR, 120 UK
Layer quantity EUR	96
Layer quantity UK	120
Pallet quantity EUR (PC)	864
Pallet quantity UK (PC)	1080
Outer case size	293 x 198 x 115 (mm)
Product status	Available


Photometric Data

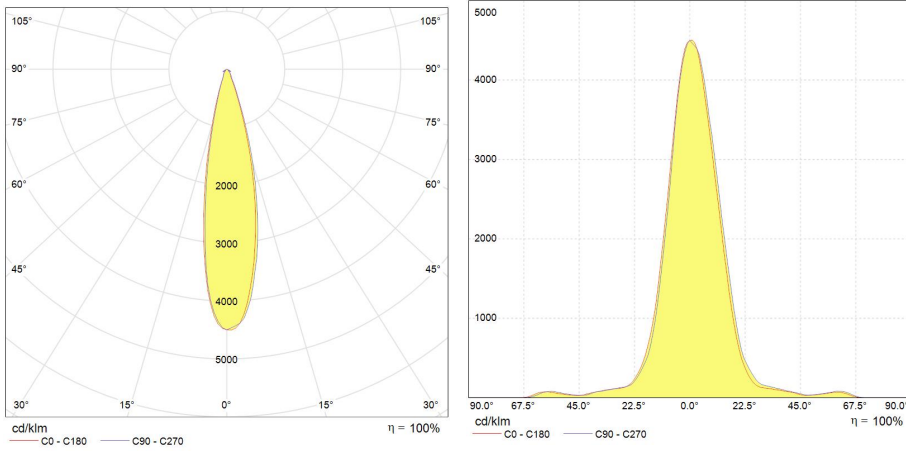

Lumen maintenance data

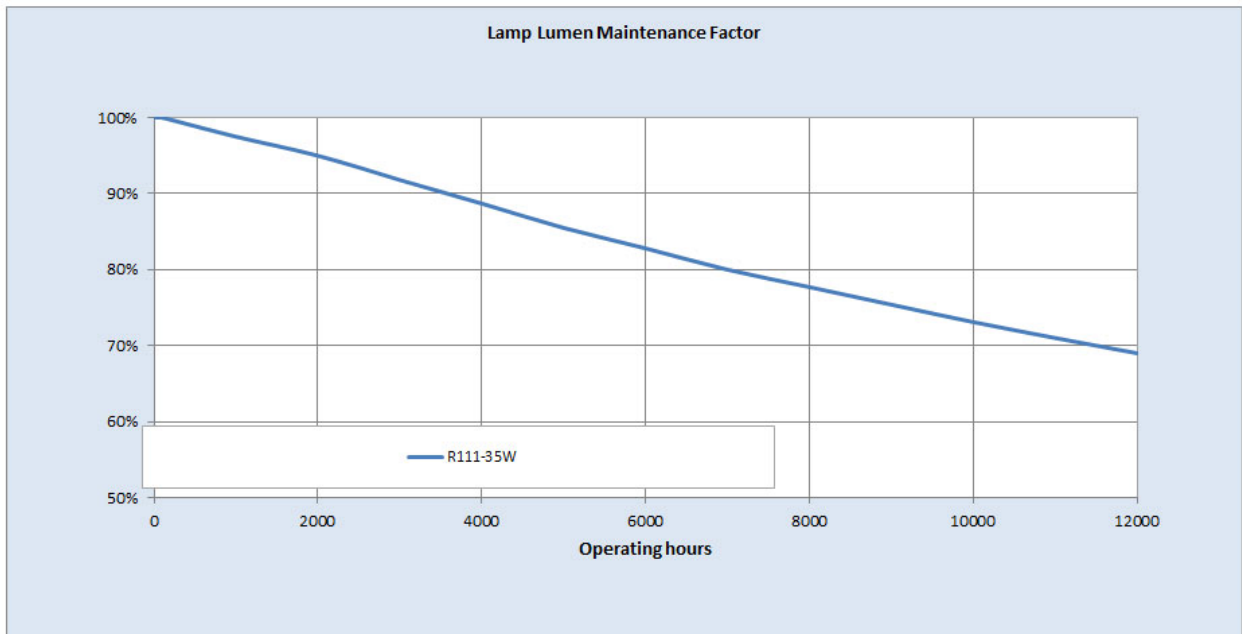

Survival data

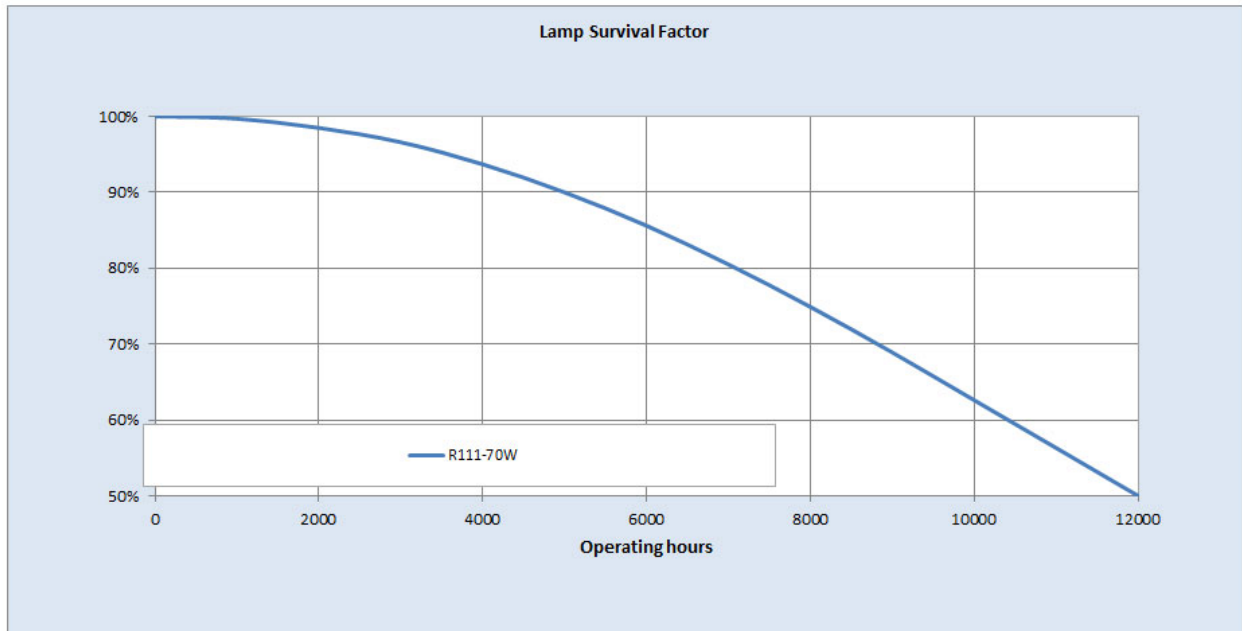

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Photometry \(IES\)](#)

[HID Lamps Spectrum Catalogue \(EN\) \(PDF\)](#)

[CMH AR111 Data sheet \(EN\) \(PDF\)](#)

[CMH Product Safety Data Sheet \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)