




GE
Lighting

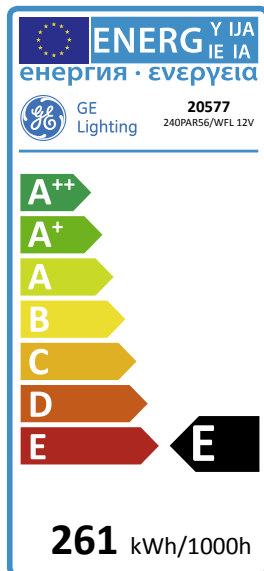

261
kWh/1000h

E
energy class

11
lumens/watt

PAR 56

240PAR56/WFL 12V

20577

Product information

PAR lamps provide a robust and flexible design solution for a wide range of applications. Choice of PAR36, PAR46, PAR56 or PAR64

- 3000 K or 4200 K colour temperature
- Choice of beam widths
- Excellent colour rendering
- High efficiency combined with low operating costs
- Robust and reliable
- UV control
- Easy retrofit
- Colour consistent throughout life
- Colour blends with halogen and fluorescent

Application areas



Club and Disco



Product data

Cap/Base	Screw terminal
Bulb Shape	PAR
Bulb Finish	Aluminized
Bulb Diameter [mm]	177.8
Maximum Overall Length [mm]	127
Net weight per piece [g]	547
Gross weight per piece [g]	687
Brand	General Electric (GE)

Performance data

Nominal beam angle [°]	30
Nominal center beam candlepower (CBCP) [cd]	13000
Nominal lumens [lm]	2570
Energy efficiency class (EEC)	E
Rated Life [h]	2000
Weighted energy consumption [kWh/1000h]	260.08

Electrical data

Nominal power [W]	240
Nominal lamp voltage [V]	12
Coil type	C-6
Ballast Required	Yes

Logistic data

DUN Code	00043168205771
Pack Quantity	12
Layer quantity	1 UK
Layer quantity UK	1
Pallet quantity UK (PC)	324
Outer case size	349 x 300 x 446 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Special purpose lamp – Stage Studio. Not suitable for household illumination.