

GLS T2-T3 8,000 hours - upgraded design ot FLE15GLS/T3/827/B22 GE 1/6T 8Y /01

33769

Product information

The 8,000 hours CFL GLS lamps offer traditional incandescent shape, long life and elegant light. Suitable for general home lighting, GE Lighting's Decor CFL range is an ideal and eco-friendly solution.

Application areas





Office









Product data

Cap/Base	B22d	
Bulb Shape	Heliax w. GLS Lookalike	
Bulb maximum overall diameter [mm]	60	
Nominal Length [mm]	117	
Net weight per piece [g]	85	
Gross weight per piece [g]	120	
Operating position	U - Universal	
Mercury Content [mg]	2	
UV radiance	exempt	
Regulatory comment	EUP related	
Brand	General Electric (GE)	

Performance data

Colour Code	827
Colour Rendering Index (CRI) [Ra]	82
Nominal correlated colour temperature (CCT) [K]	2700
Nominal lumens [lm]	830
Rated Lumens [lm]	830
Energy efficiency class (EEC)	А
Rated Life [h]	8000
Weighted energy consumption [kWh/1000h]	15





Electrical data

Nominal power [W]	15
Rated power [W]	15.0
Nominal lamp voltage [V]	230
Lamp Current [A]	0.11
Operating Temperature (MAX) [°C]	50
Startup time [sec]	1
Run-up time (sec)	100
Starting time (sec)	1
Number of switching cycles	30000
Dimming Capability	No


Logistic data

DUN Code	10043168337691	
EAN Code	0043168337694	
Pack Quantity	6	
Inner pack type	BOX	
Outer pack type	TRAY OUTER	
Layer quantity	186 EUR, 234 UK	
Layer quantity EUR	186	
Layer quantity UK	234	
Pallet quantity EUR (PC)	1302	
Pallet quantity UK (PC)	1638	
Outer case size	211 x 141 x 144 (mm)	
Product status	Available	






Technical drawing

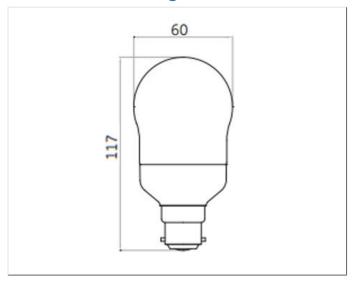

Spectral





33769

Survival data



Hours	Survival rate 3 hours	Lumen maintenance
100	1.00	1.00
2,000	0.98	0.85
4,000	0.90	0.81
6,000	0.72	0.78
8,000	0.50	0.75

Test condition: 50Hz 230V 3 hours cycling - according to IEC60969

Downloads & Links

Go to the catalog site (HTTP)

CFL Integrated Spectrum Catalogue (PDF)

CFL Integrated GLS Lamps - Data sheet (PDF)

Disposing and Cleaning of CFL Lamps (HTTP)

Lighting design tools & calculators (HTTP)

Datasheets (HTTP)

Disposing and Cleaning of CFL Lamps (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)